


1、Parameter

Part NO.	GNL-AL-1210	GNL-AL-5050
LED NO.	60pcs/M 72pcs/M	60pcs/M 72pcs/M
Power	4.8W / 5.8W	14.4W / 17W
Voltage	12VDC	12VDC
Fixture Material	Aluminum	
Packing Dimension	14×20×1000mm	
Lifespan	30,000 to 50,000 hours	
Working conditions	-20℃ - +40℃	
Color Temperature	<p>Gold lighting apply warm white (300k-3500k)</p> <p>Jewels and jade lighting apply white (4500k-5500k)</p> <p>Diamond lighting apply cold white (7500k-8500k)</p>	


2、Data specification

Model NO.	Color	Peak Wavelength (nm)	View Angle 2 θ 1/2	Model NO.	Color	Peak Wavelength (nm)	View Angle 2 θ 1/2
GNL-AL-1210UEC	RED	625nm	120°	GNL-AL-5050UEC	RED	625nm	120°
GNL-AL-1210UYC	Yellow	590nm	120°	GNL-AL-5050UYC	Yellow	590nm	120°
GNL-AL-1210UBC	Blue	470nm	120°	GNL-AL-5050UBC	Blue	470nm	120°
GNL-AL-1210PGC	Green	520nm	120°	GNL-AL-5050PGC	Green	520nm	120°
GNL-AL-1210UWC	White		120°	GNL-AL-5050UWC	White		120°
GNL-AL-1210UWC- Y	Warm White		120°	GNL-AL-5050UWC-Y	Warm White		120°
				GNL-AL-5050RGB	RGB		120°

3、 Suite drawing


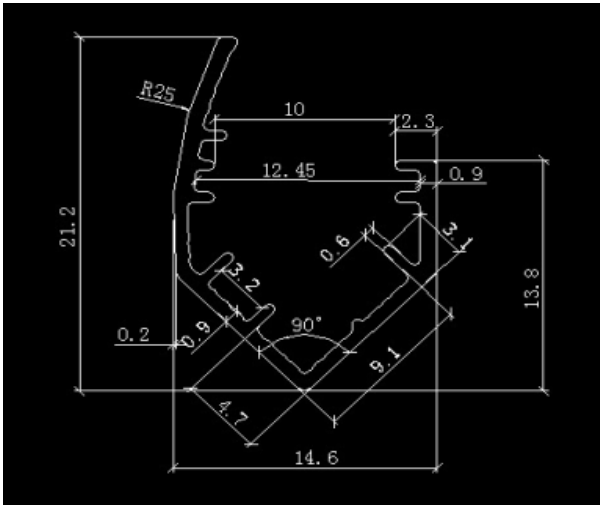


1421

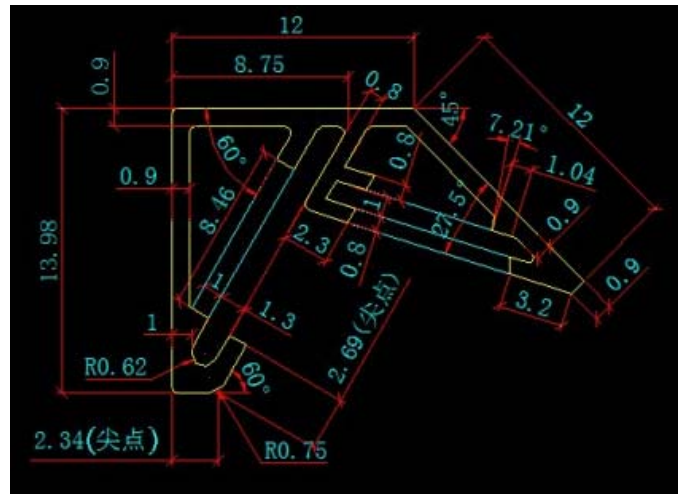

1420

4、 Connect

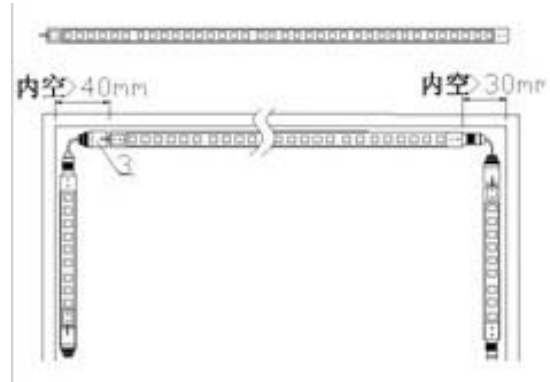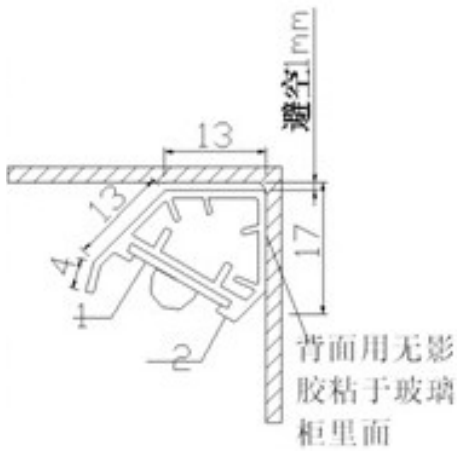

5、cuting



6.Practical application

