



**TAEHWATRANS**


CURRENT TRANSFORMER SPECIFICATION

MODEL NO**CONNECTION****CUSTOMER****TZ76V****PCB MOUNTABLE****STANDARD TYPE****1. DRAWING**

< Front >

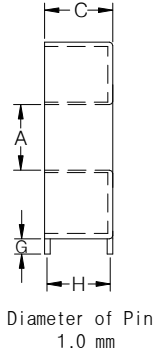

< Profile >



< Back >

2. DIMENSION

(Unit mm/inch)

A (MIN)	B (MAX)	C (MAX)	D (MAX)	E (±0.3)	F (±0.3)	G (±0.5)	H (±0.3)
12.9	39.3	14.0	38.0	25.2	32.8	3.0	12.1
0.508"	1.547"	0.551"	1.496"	0.992"	1.291"	0.118"	0.476"

3. ELECTRICAL PROPERTIES

Standard Accuracy	0.1Class(Meter0.2 Class)	DC Resistance	48 ~ 54Ω
Turn Ratio	1 : 2,500	Frequency	50Hz / 60Hz
High Potential Voltage	a.c 4.5KV / Min	Max Current	350A (At 1.14Ω)
Safety Certificate	TUV, UL	International Standard	Conforming to IEC62053-22
Application	0.2class transformer connected meters		

4. TESTING VALUE

50Hz 0.25A / 0.1mA		50Hz 5A / 2mA	
Ratio Error (%)	Phase Shift (min)	Ratio Error (%)	Phase shift (min)
± 0.1	3 ± 3	± 0.1	3 ± 2

TAEHWATRANS CO., LTD Tel : 82 31 315 8161-4

288-2, Misan-Dong, Siheung-City, Fax : 82 31 315 8165

Gyeonggi-Do, Korea, Email: sales@taehwatrans.com



This documents is drafted by **TAEHWATRANS** and shall not be revised and disclosed to the third parties without the permission of **TAEHWATRANS**. Rev. TH02. 2009. 02, 20