



HYBRID STEPPING MOTOR 36SHD4001-11B

Casun®

General specification		Electrical specification	
Step angle	1.8° ± 5%	Rated voltage	6.0V
Number of phase	2	Rated current	0.3A
Insulation resistane	100MΩmin. (500V DC)	Resistance per phase	18.3Ω ± 10%
Insulation class	Class B	Inductance per phase	5.7mH ± 20%
Rotor inertia	4g. cm ²	Holding torque	22mN. m
Mass	0.06kg	Detent torque	6mN. m

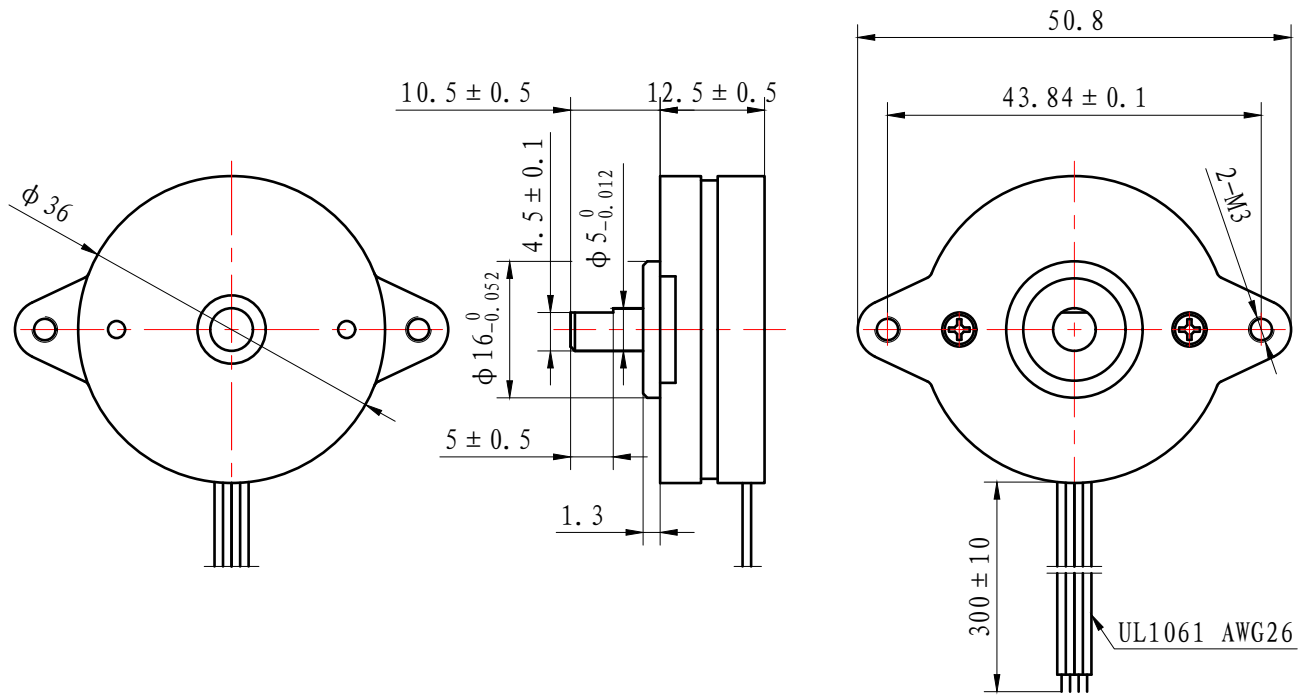

Wiring diagram



36SHD4001-11B

A0					
版本	更改内容				
设计					
审核					
工艺					

广州福得电子科技有限公司
GUANGZHOU FUDE ELECTRONIC TECHNOLOGY CO., LTD

36SHD4001-11B型步进电动机规格书

FT3.162.4044

图样标记 重量 比例

共 1 张

第 1 张