


HYBRID STEPPING MOTOR 57SHD0602-30B


Casun®

General specification		Electrical specification	
Step angle	1.8°	Rated voltage	6.6V
Number of phase	2	Rated current	0.88A
Insulation resistane	100MΩmin. (500V DC)	Resistance per phase	7.5Ω ± 10%
Insulation class	Class B	Inductance per phase	18mH ± 20%
Rotor inertia	280g.cm ²	Holding torque	1000mN.m
Mass	0.62kg	Detent torque	45mN.m

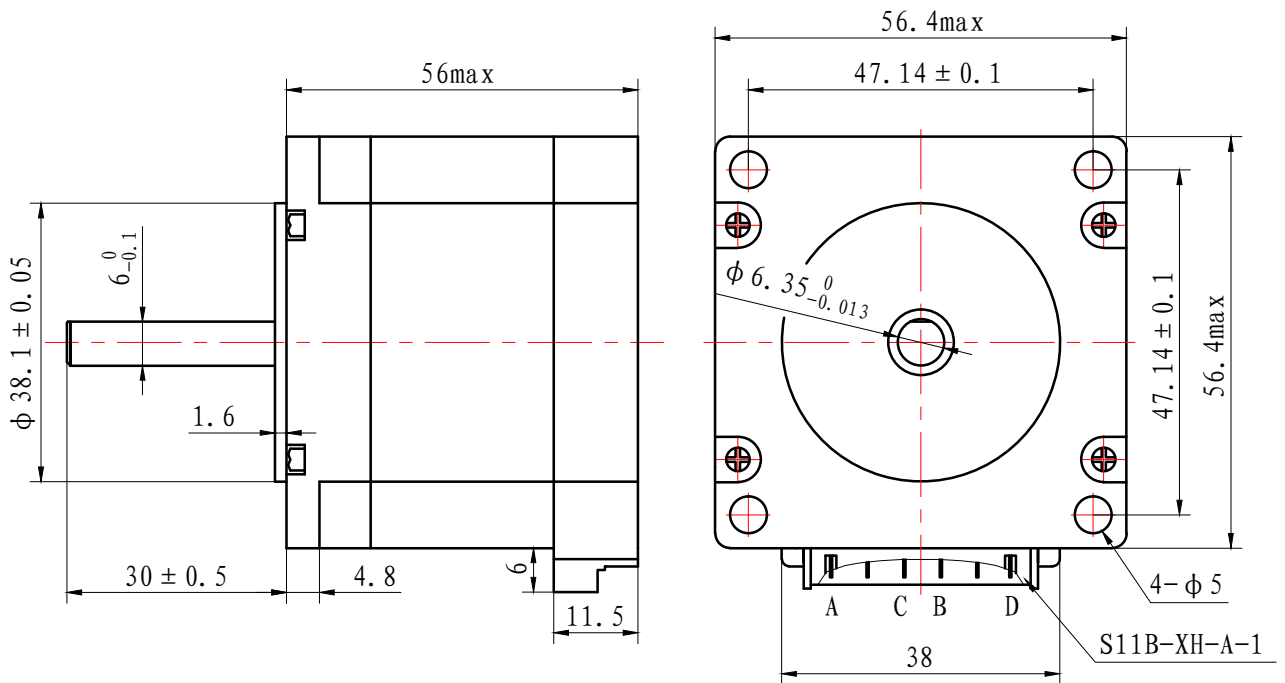

57SHD0602-30B

Wiring diagram



Note:

				广州福得电子科技有限公司		
				GUANGZHOU FUDE ELECTRONICS TECHONLONGY CO.,LTD		
A0				57SHD0602-30B型步进电动机规格书		
版本	更改内容	签字	日期			
设计	标准化	图样标记		重量	比例	
	批准					
审核						
工艺	日期	共 1 张		第 1 张		
						FT3.162.