


Nominal voltage	12 V	
Nominal capacity	8,0 Ah @ C20 to 1,75 V/cell	
Dimensions	Length	151 mm
	Width	65 mm
	Height / Total height	94 / 100 mm
Weight	~ 2,15 kg	
Technology	VRLA (Valve Regulated Lead Acid) AGM (Absorbent Glass Mat)	
Design life time	10-12 years (standby use)	
Internal resistance	~ 30,0 mΩ (full charged)	
Operating temperature range	Discharge	-20°C ~ +60°C
	Charge	0°C ~ +50°C
	Storage	-20°C ~ +60°C
Maximum discharge current	80 A (5 sec.)	
Short circuit current	375 A	
Recommended maximum charging current	2,4 A	
Charging voltage	Standby use	13,7 ~ 13,9 VDC
	Cycle use	14,6 ~ 14,8 VDC
Self discharge	Monthly is less than 3% at 25°C	
Container material	ABS UL94HB (optional UL94-V0)	
Terminal types	fast-on 4,8 mm	

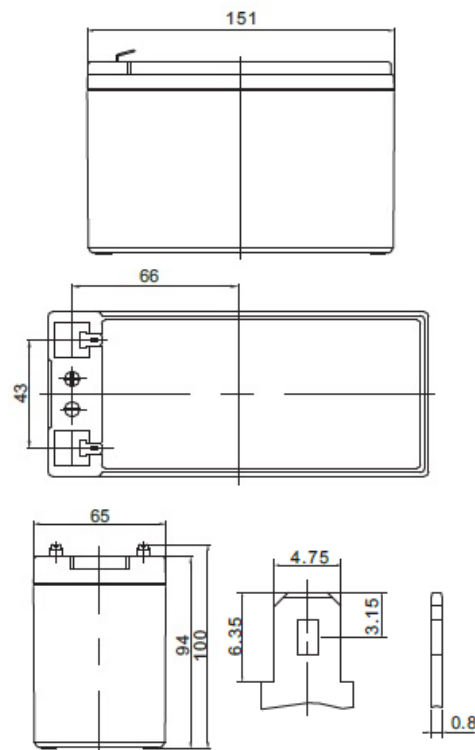

CONSTANT CURRENT DISCHARGE CHARACTERISTICS (A at 25°C)

Voltage / Time	5 min	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
9.6 V	30,35	21,45	15,51	8,90	4,89	3,00	2,27	1,82	1,51	0,97	0,789	0,417
10.0 V	28,23	20,27	14,83	8,55	4,72	2,91	2,19	1,77	1,47	0,96	0,779	0,410
10.2 V	25,47	18,66	13,89	8,17	4,57	2,81	2,13	1,72	1,43	0,95	0,767	0,405
10.5 V	22,82	17,08	12,92	7,81	4,40	2,71	2,06	1,68	1,40	0,93	0,757	0,400
10.8 V	20,03	15,46	11,93	7,47	4,23	2,61	2,00	1,63	1,36	0,92	0,748	0,396
11.1 V	15,90	12,64	9,90	6,43	3,80	2,40	1,85	1,52	1,27	0,86	0,704	0,376


CONSTANT POWER DISCHARGE CHARACTERISTICS (W at 25°C)

Voltage / Time	5 min	10 min	15 min	30 min	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
9.6 V	302,0	218,8	162,7	97,1	55,11	34,13	25,85	20,98	17,45	11,38	9,31	4,920
10.0 V	284,0	210,7	157,8	94,1	53,53	33,20	25,16	20,49	17,06	11,27	9,20	4,848
10.2 V	262,1	197,6	150,0	90,9	52,11	32,28	24,59	20,00	16,68	11,13	9,08	4,800
10.5 V	240,0	184,1	141,7	87,8	50,51	31,30	23,95	19,57	16,31	11,00	8,97	4,746
10.8 V	215,2	169,6	132,6	84,7	48,86	30,33	23,30	19,07	15,95	10,84	8,86	4,704
11.1 V	174,4	141,1	111,6	73,7	44,09	27,94	21,64	17,80	14,92	10,19	8,36	4,470


According with:

PN-EN 60896-21:2007	ISO 9001
PN-EN 60896-22:2007	ISO 14001
PN-EN 61056-1:2013	
PN-EN 61056-2:2013	
PN-E-83016:1999	


EFFECT OF TEMPERATURE ON LONG TERM LIFE

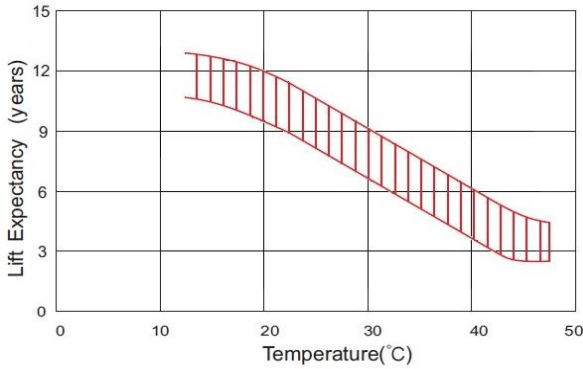


CYCLE LIFE IN RELATION TO DEPTH OF DISCHARGE

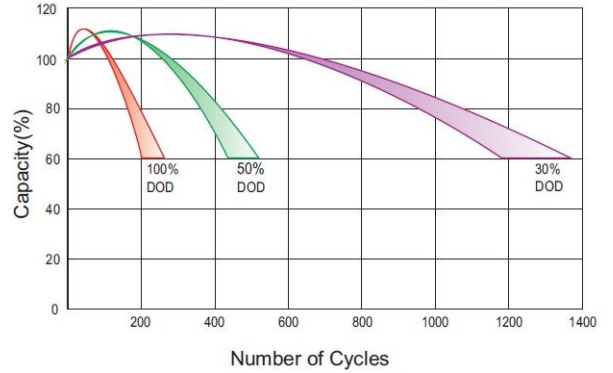


DISCHARGE CHARACTERISTICS

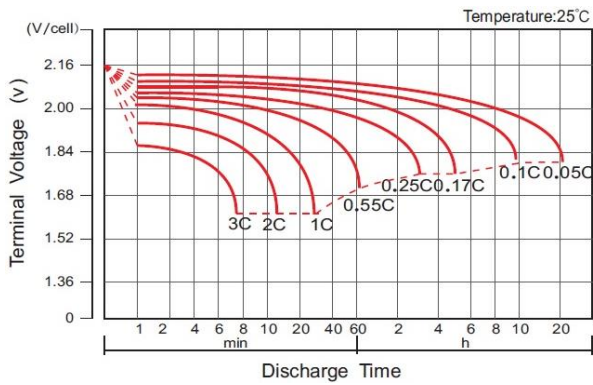

CHARGE CHARACTERISTIC FOR STANDBY USE

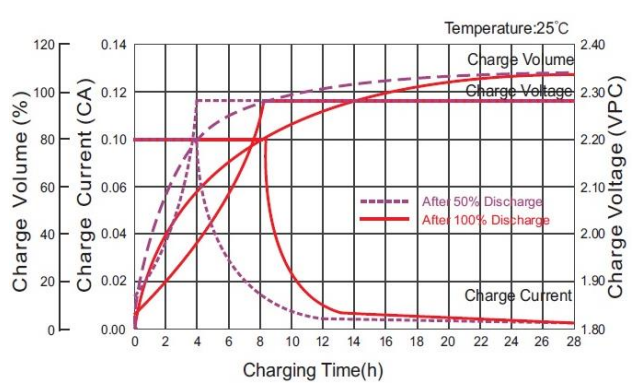

RELATIONSHIP BETWEEN CHARGING VOLTAGE AND TEMPERATURE

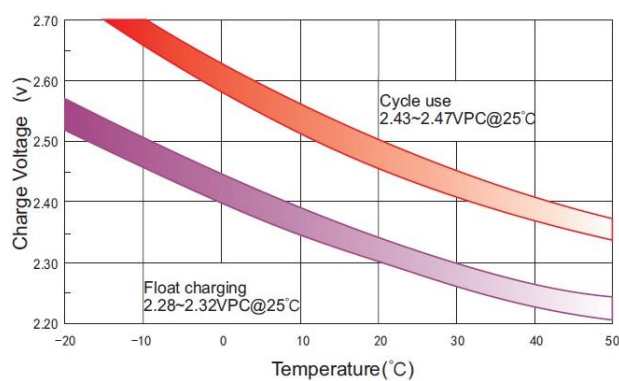

STORAGE CHARACTERISTICS

