


FEATURES:

- RoHS compliant
- Switching power modules for PCB mounting
- Fully encapsulated plastic case
- Universal input: 90-260VAC, 47-440Hz, or 120-370VDC

- Low ripple and noise
- High efficiency up to 75%
- Standard package
- Regulated output

Models
Single output

Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Max Output wattage (W)	Output Voltage (V)	Output Current max (A)	Minimum load (%)	Efficiency (%)
AME10-3.3SZ	90-260/47-440	120-370	10	3.3	3	4	65
AME10-5SZ	90-260/47-440	120-370	10	5	2	5	71
AME10-12SZ	90-260/47-440	120-370	10	12	0.833	5	74
AME10-15SZ	90-260/47-440	120-370	10	15	0.666	3	71
AME10-24SZ	90-260/47-440	120-370	10	24	0.426	5	74

Models
Dual output

Model	Input Voltage (VAC/Hz)	Input Voltage (VDC)	Max Output wattage (W)	Output Voltage (V)	Output Current max (A)	Minimum load (%)	Efficiency (%)
AME10-5DZ	90-260/47-440	120-370	10	±5	±800	1	71
AME10-12DZ	90-260/47-440	120-370	10	±12	±380	3	75
AME10-15DZ	90-260/47-440	120-370	10	±15	±300	1	72

Input Specifications

Parameters	Conditions	Typical	Maximum	Units
Current	115 VAC		200	mA
	230 VAC		130	mA
Inrush current <2ms	115 VAC		10	A
	230 VAC		20	A
Leakage current			0.75	mA
External fuse	Recommended slow blow type	1.5		A

Output Specifications

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±2		%
Line regulation	LL-HL	±0.3		%
Load regulation	5-100%	±0.5		%
Maximum capacitive load	Depending of the model	470-23 000		μF
Noise			<0.5 %Vout + 50 mV	
Ripple			<0.2 %Vout + 40 mV	
Hold-up time	Min	15		ms

Isolation Specifications

Parameters	Conditions	Typical	Maximum	Units
Input / Output		3000		VAC
Input FG		1500		VAC
Output FG		500		VAC

General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency		100		KHz
Over current protection	Auto recovery	Hiccup		
Over voltage protection		Zener diode clamp		
Short circuit protection	Auto recovery	Hiccup mode, indefinite		
Operating temperature	With derating above 50°C	-25 +70		°C
Storage temperature		-40 to +85		°C
Temperature coefficient		0.02		% / °C
Cooling		Free air convection		
Humidity	Non condensing		95	% RH
Case material		Plastic resin + Fiberglas (flammability to UL 94V-0)		
Weight		58		g
Dimensions	2.52 x 1.77 x 0.85 inches		64.0 x 45.0 x 21.5 mm	
MTBF		> 250 000 hrs (MIL-HDBK -217F, t=+25°C)		


Safety Specifications

Standards

Safety	EN55022 class B (EMI – Conducted and radiated emission) , EN 50082-1 (EMS – Noise Immunity)
Agency approvals	cUL, CE


Pin Out Specifications

Pin	1500VDC	
	Single	Dual
1	FG	FG
2	AC Input (N)	AC Input (N)
3	AC Input (L)	AC Input (L)
4	-V Output	-V Output
5	No pin	Common
6	+V Output	+V Output

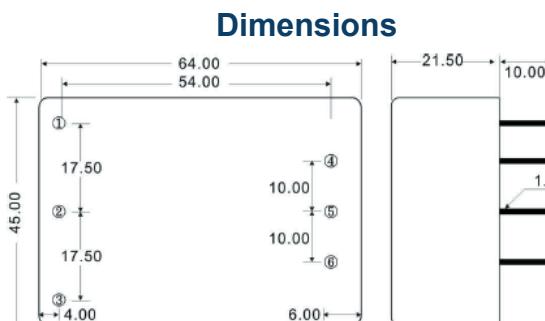

Block diagram

Single output

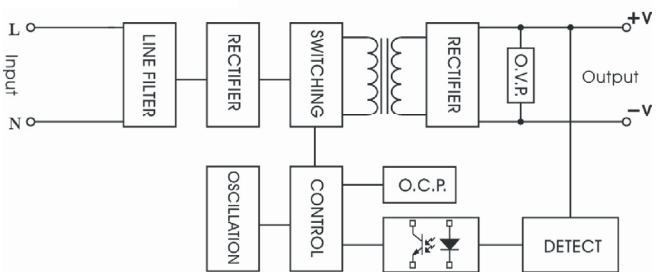

Dual output

