



BRIGHT LED ELECTRONICS CORP.

Total Page: 6
Page: 1
Revision: 1.0

Customer P/N : Omron EE-SX1035

Device Number : BPI-3C1-10

Features:

- * Non-contact switching.
- * For direct PC board or dual-in-line socket mounting.
- * Fast switching speed.

Sheet Date	1	2	3	4	5	6			Contents
2001.12.20	1.0	1.0	1.0	1.0	1.0	1.0			Initial Released
2002.01.08	1.0	1.0	1.1	1.0	1.0	1.1			1. Packaging Dimensions: Pin Length: 4.5mm → 3.5mm 2. Packaging Bag Dimensions
2002.04.05	1.0	1.1	1.1	1.0	1.0	1.1			Light Current: IL: max 10mA → 5mA

Total Page	6																		
------------	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

佰鴻工業股份有限公司

BRIGHT LED ELECTRONICS CORP.

台北縣板橋市和平路 19 號 3 樓

3F., No. 19, Ho Ping Road, Pan Chiao City,
Taipei, Taiwan, R. O. C.

Tel: 886-2-29591090

Fax: 886-2-29547006/29558809

www.brtled.com.

廣東省東莞市高 鎮蘆溪管理區高龍東路八號

No.8 Gaolong east way Luxi precinct Gaobu




Town Dongguan city Guangdong Province

China

Tel : 886-0769-8730255 8731855

Fax : 886-0769-8733355 8738706

www.brtled.com.

Approved	Checked	Drawn
 陳 2002.04.05 林麟	 潘 2002.04.05 文鵬	 樊 2002.04.05 小燕

BRIGHT LED ELECTRONICS

Device Number : BPI-3C1-10
 Absolute Maximum Rating (Ta=25)

Page: 2
 Version: 1.1

Item		Symbol	Rating	Unit
Input	Power Dissipation	Pd	75	mW
	Reverse Voltage	V _R	5	V
	Forward Current	I _F	50	mA
	Peak Forward Current (*1)	I _{FP}	1	A
Output	Collector Power Dissipation	P _C	100	mW
	Collector Current	I _C	20	mA
	C-E Voltage	V _{CEO}	30	V
	E-C Voltage	V _{ECO}	5	V
Operating Temperature		Topr	-25 ~ +85	
Storage Temperature		Tstg	-40 ~ +100	
Soldering Temperature (*2)		Tsol	260	

(*1) tw=100 uSec., T=10 mSec.

(*2) t=5 Sec


Electrical Optical Characteristics (Ta=25)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Input	Forward Voltage	V _F	I _F =20mA	—	1.2	1.5	V
	Reverse Current	I _R	V _R =5V	—	—	10	μ A
	Peak Wavelength	ρ	I _F =10mA		940		nm
Output	Dark Current	I _D	V _{CE} =10V	—	—	100	nA
	C-E Saturation Voltage	V _{CE(sat)}	I _C =0.25mA I _F =10mA	—	—	0.4	V
Light Current		I _L	V _{CE} =5V I _F =10mA	0.5	—	5	mA
Speed	Rise Time	Tr	I _{FP} =20mA V _{CE} =5V	—	15	—	μ sec
	Fall Time	Tf	R _L =1000	—	20	—	μ sec

BRIGHT LED ELECTRONICS

Device Number : BPI-3C1-10
Package Dimensions

Page: 3
Version: 1.1

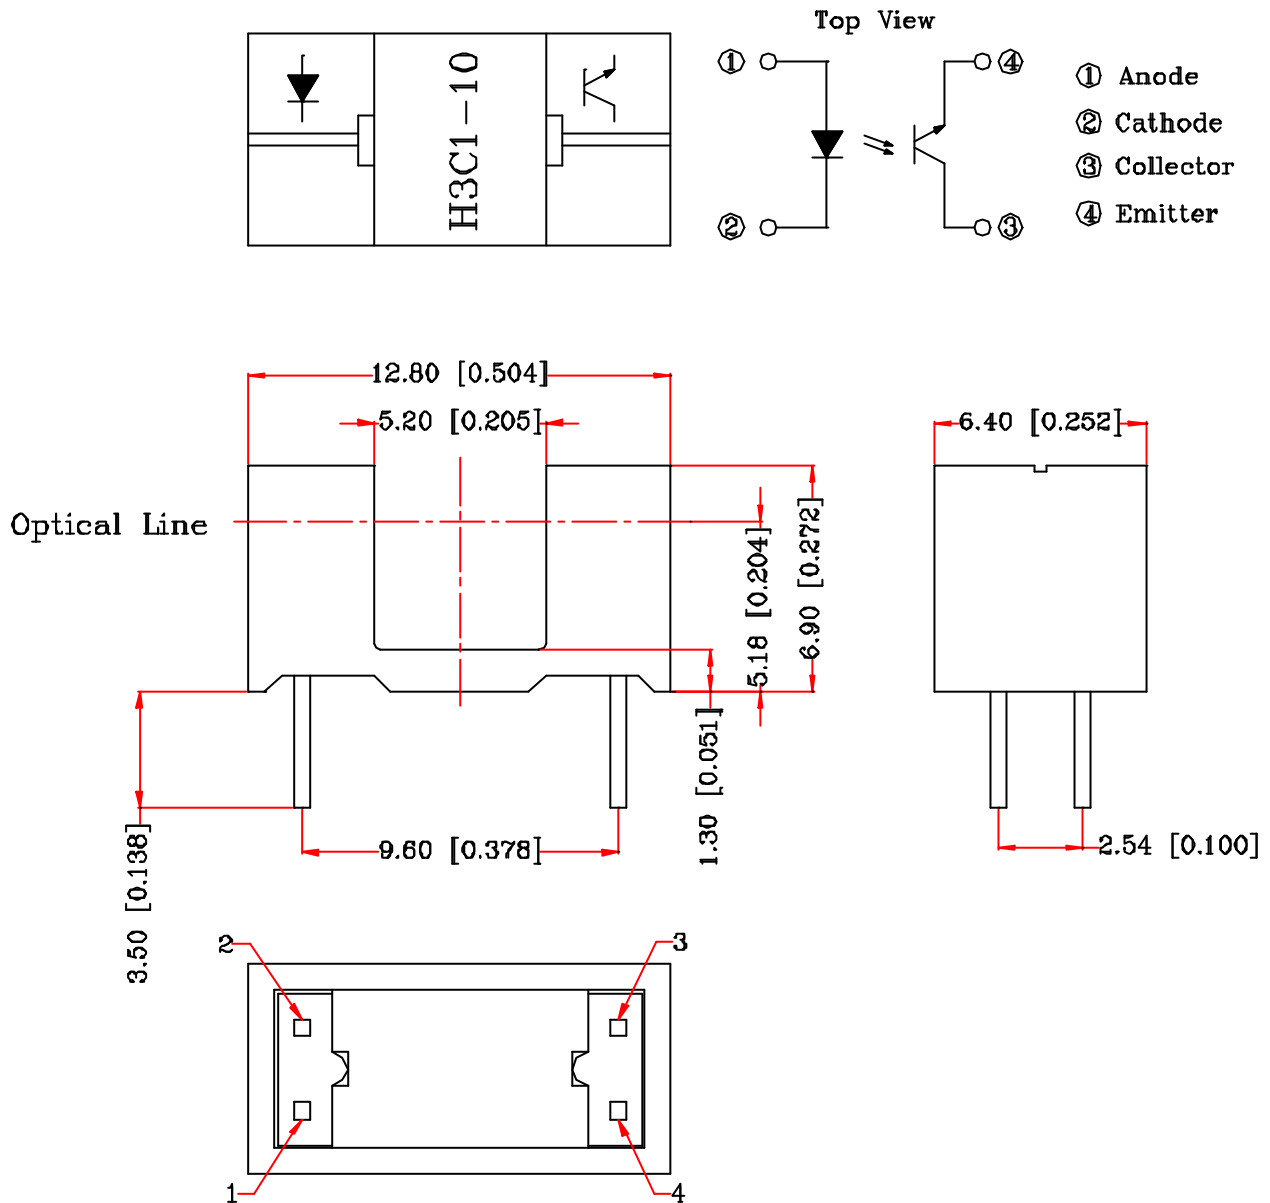

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is ± 0.25 mm unless otherwise specified.
3. Lead spacing is measured where the leads emerge from the package.
4. Specifications are subject to change without notice.

BRIGHT LED ELECTRONICS

Device Number : BPI-3C1-10
 Typical Electrical / Optical Characteristics Curves (Ta=25 °C)

Page: 4
 Version: 1.0

Fig.1 Power Dissipation vs. Ambient Temperature

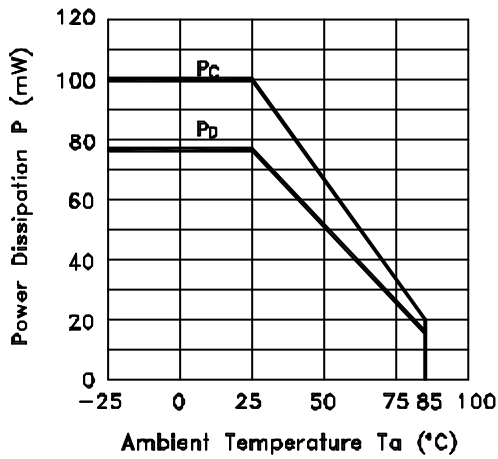


Fig.2 Forward Current vs. Forward Voltage

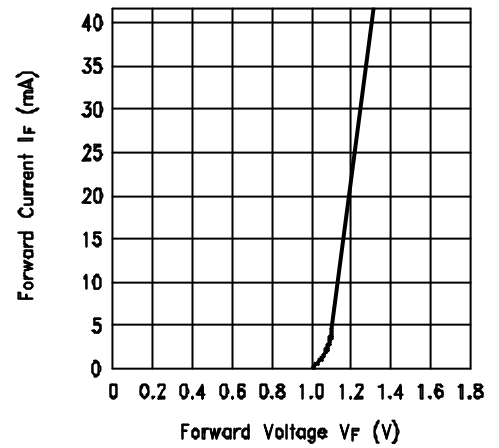


Fig.3 Collector Current vs. Collector-emitter Voltage


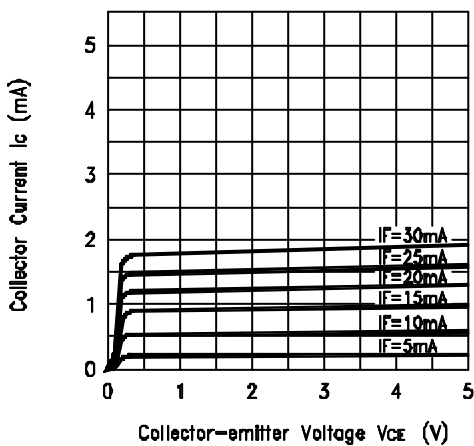


Fig.4 Collector Current vs. Ambient Temperature

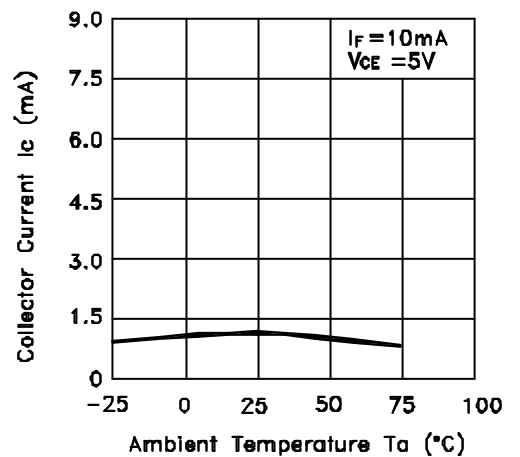

BRIGHT LED ELECTRONICS

Device Number : BPI-3C1-10

Typical Electric / Optical Characteristics Curves (Ta=25)

Page: 5

Version: 1.0

Fig.5 Collector-emitter Saturation Voltage vs. Ambient Temperature

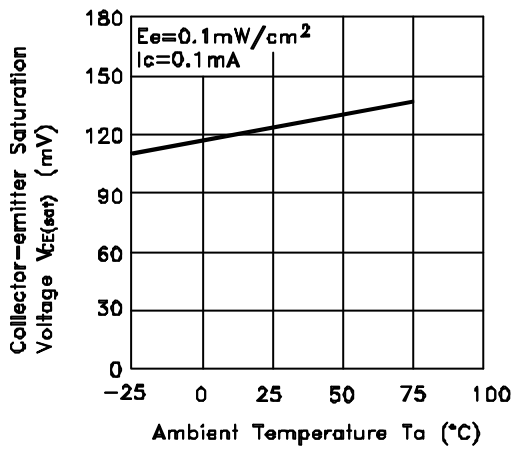


Fig.6 Response Time vs. Load Resistance



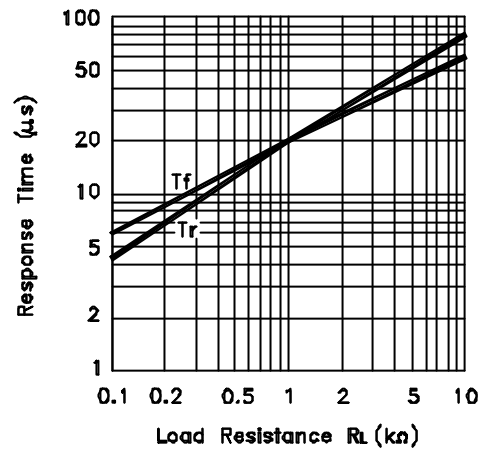


Fig.7 Sensing Position Characteristics (Typical)

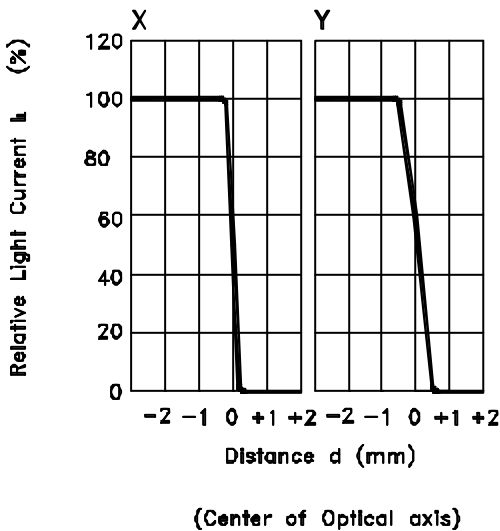


Test Circuit for Response Time

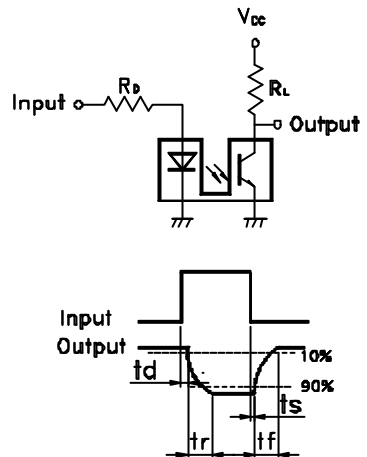


BRIGHT LED ELECTRONICS

Device Number : BPI-3C1-10
Packaging Box Dimensions

Page: 6
Revision: 1.1

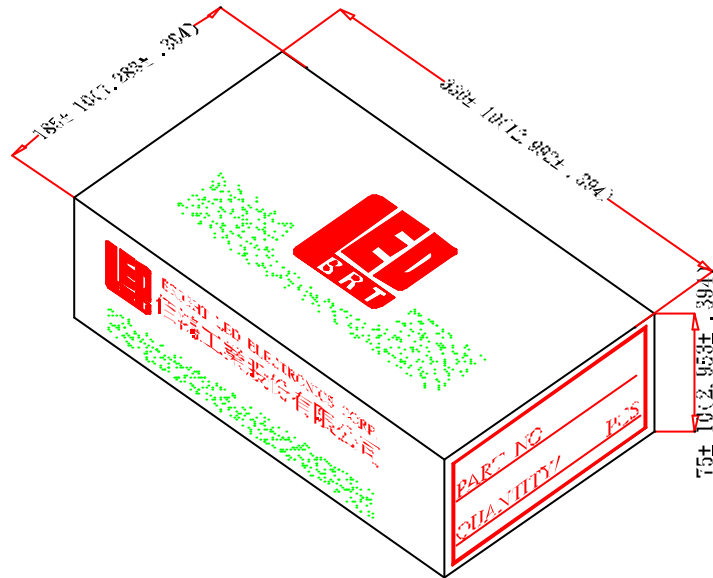

Packaging Bag Dimensions

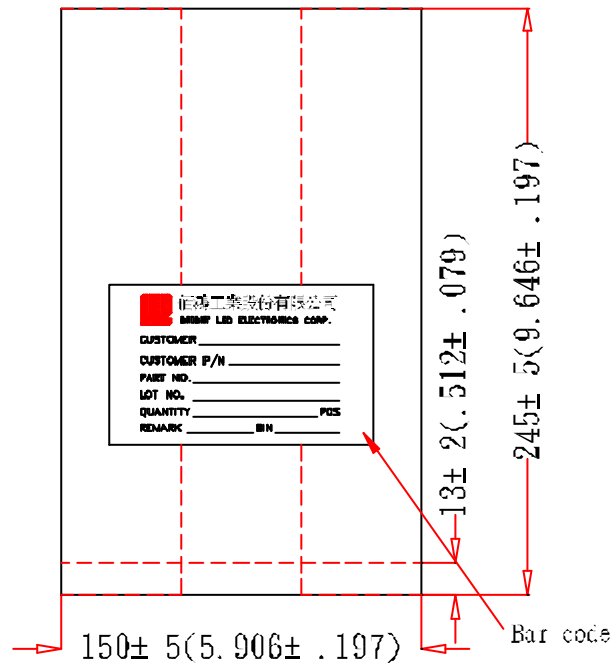

Notes:

1. 250pcs per bag, 1kpcs per box.
2. All Dimensions are in millimeters (inches).
3. Specifications are subject to change without notice.