








DEGSON ELECTRONICS CO., LTD.

Product Specification

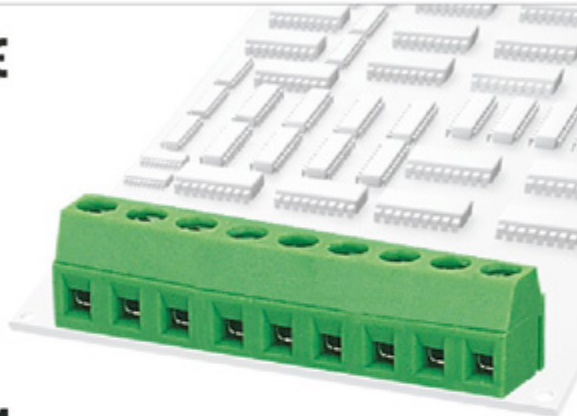

DG381-3.5
DG381-3.81




| | | |
|-----------------------|--------------|--------------------|
| Approval | | |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 150V,300V | 130V |
| Rated current | 10A | 10A |
| Wire range | 26-16AWG | 1.0mm ² |
| With standing voltage | AC1250V/1Min | |

| | |
|---------------------|----------------------------|
| Mechanical | |
| Torque | 0.2Nm(1.7Lb-In.) |
| Ambient temperature | -40°C~+105°C |
| Strip length | 5mm |
| Dimensions | |
| Pitch | 3.5mm(.138")/3.81mm(.150") |
| Poles | 2P,3P-24P |

| | |
|-----------------|-------------------------------------|
| Material | |
| Housing | PA66, UL94V-0 |
| Screws | M2,steel,Cr ³⁺ Zn plated |
| Pin header | Phosphor bronze,Tin plated |
| Cage | Brass,Ni plated |

HOW TO ORDER

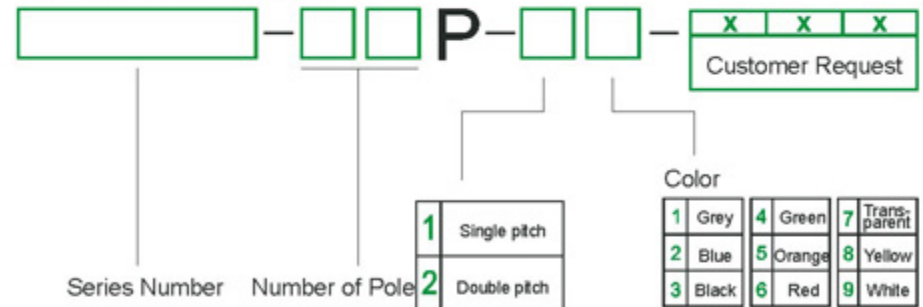

| | |
|--|--|
| | DEGSON ELECTRONICS CO., LTD. |
| | NAME DG381-3.5 DG381-3.81 |