
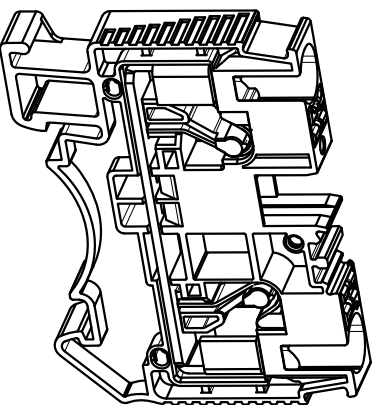
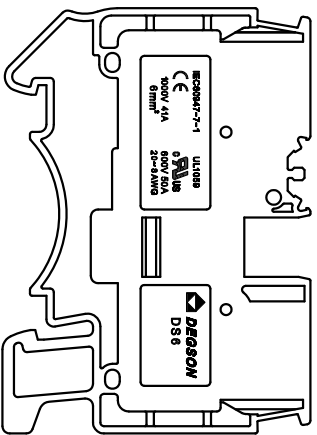
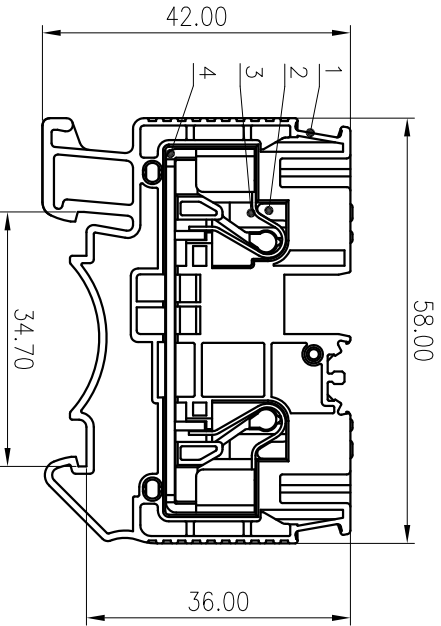


公差/General tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±Z	±Z



4	Current carrier	Copper	Sn Plated
3	Spring	Stainless steel	
2	Button	PA66 (T)	UL94V-0
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL Standard: B C D			
额定电压/电压/Rated Voltage(V)/Current(A) 600/50 600/50 600/5			
IEC 标准/IEC Standard: B C D			
过压类别/Overvoltage Category/污染等级 III/3 III/2 II/2			
级/ Pollution Degree			
额定电压/电流/Rated Voltage(V)/Current(A) 1000/41 / /			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) 8.0 / /			
额定脉冲电流(N.m/Lb.in) / /			
额定扭矩/Torque Tightening(N.m/Lb.in) / /			
导线范围/硬线和软线/Wire Range(rigid and flexible)(mm² /AWG) 0.5~6&10(sol)/20~8			
间距/Pitch(mm)/线数范围/Poles 8.2/01P			
剥线长度/Stripping length(mm) 10~12			
使用温度范围/Operating temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			
标准颜色编号/Standard color number: /			
PANTONE / RAL /			

MATERIAL: SURFACE:

MAT NO.:

STATUS:

APPD: Li GL 2020.08.17

CHKD: Moo J 2020.08.17

DRFT: ding 2016.04.16

SIZE: A4

mm inch

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DS6-01P-1Y-00A&Z(H)

DRAWING NO.: DS6-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV T1

SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE
(T1)	/	Modify the button material description	Feng X	2020.08.17