

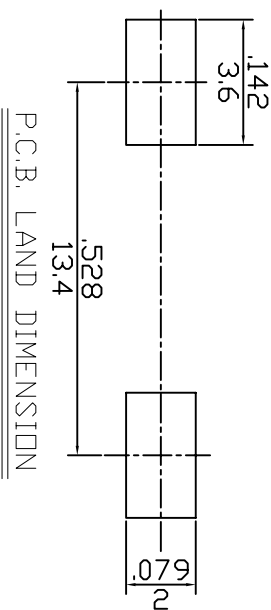



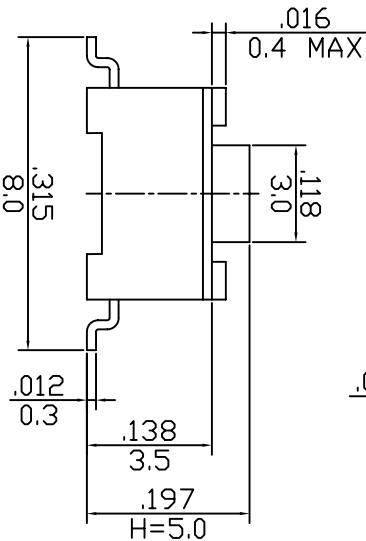

CIRCUIT DIAGRAM

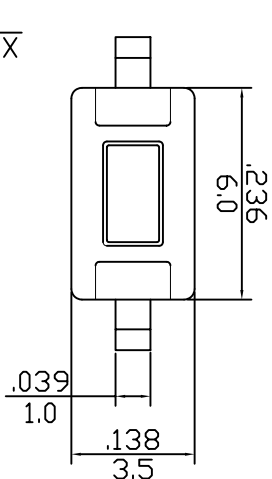

P.C.B. LAND DIMENSION

Rating	DC12V 0.5A	Operation force	130±30gf
Insulation resistance	≥100MΩ	Free position	5.0±0.3mm
Contact Resistance	≤100mΩ (MAX)	Travel	0.25 ^{+0.25} _{-0.1} mm
Soldering temper	245°C±5°C 3 Sec.	Temperature range	-20°~+70°C
Mechanical life	100,000 cycles	Moisture resistance	60°±2°C, 90~95% RH
Electrical life	50,000 cycles		

Case	Stanyl
Stem	Stanyl
Terminal	C2680R-EH (Ag 0.5u)
Cover	SUS 301
C/PLATE	SUS 304

REVISION	DESCRIPTION	REVISED BY	TOLERANCES X±	ANGLE 1/2°	UNIT mm	PART NAME	DTSM SPEC DRAWING	DWG NO
△			DRAWN BY 吳美玉	DESIGNED BY ERIC	SCALE			WS0132A
△			CHECKED BY 吳美玉	APPROVED BY				
△	2005.08.26 更新圖框 發圖				DATE 2005.08.26	PART NO	DTSM-32N	

