




/ Product dimensions /

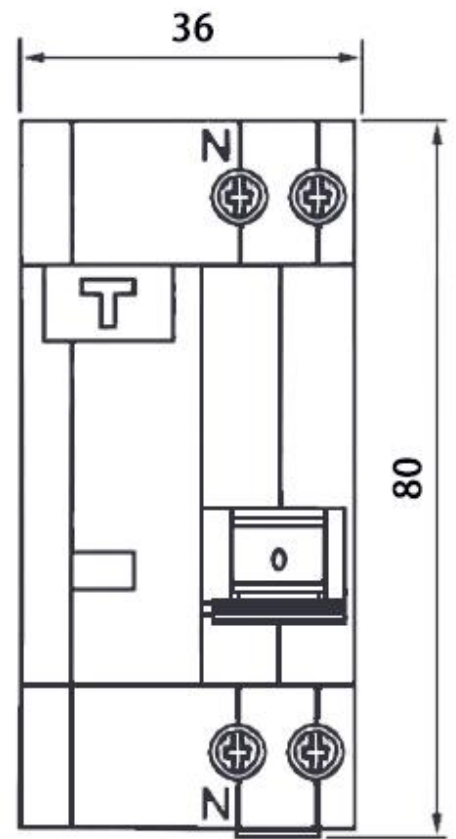

/ Wiring Diagram /

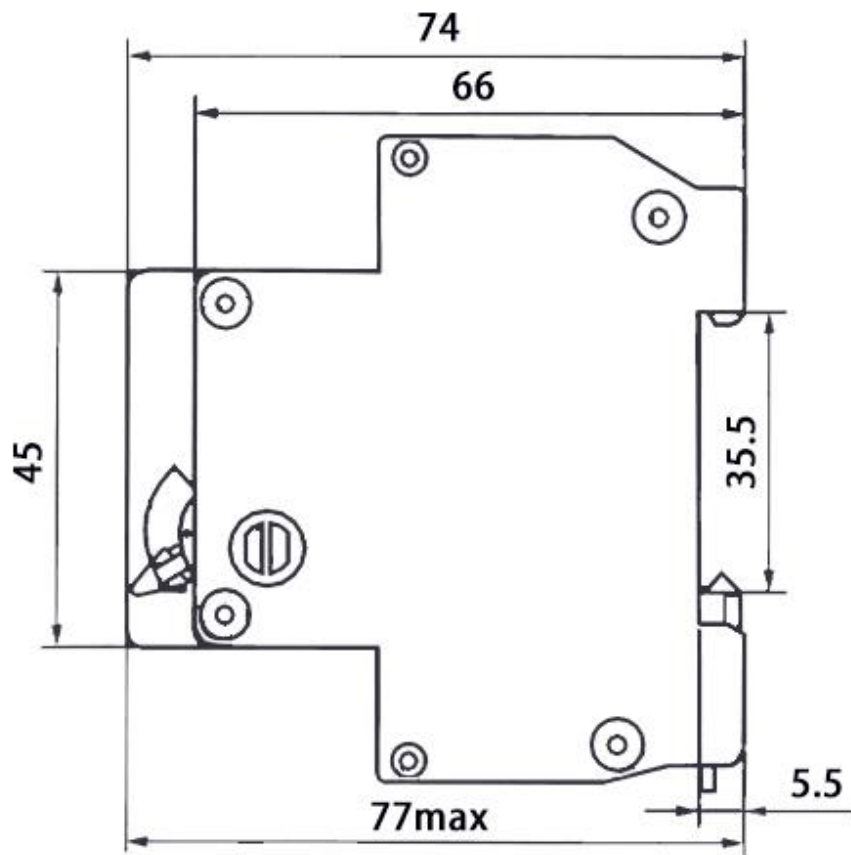

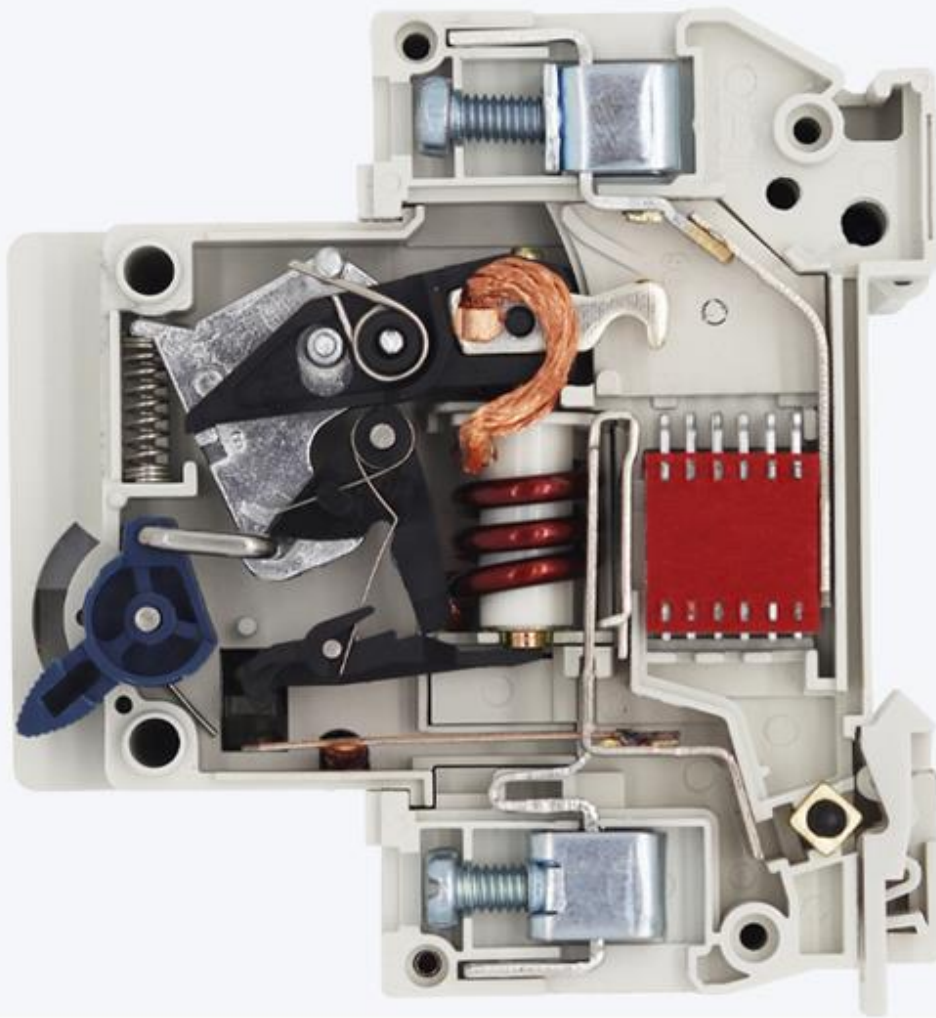

More safe and reliable arc extinguishing structure

Specification

Product Model		DZ30LE-32			DZ30LE-63	
Pole		1P+N				
Rated Current (A)		10, 16, 20, 25, 32			40, 63	
Rated Residual Operating Current(mA)		30				
Rated Residual Non-operating Current (mA)		15				
Rated Voltage (V)		230				
Residual Current Off-time		≤0.1S				
Short Circuit Capacity(Icu)		6000A			4500A	
Testing Current (A)	Rated Voltage (V)	Limited Time	Pre-engage Result	Start Situation	Note	
1.13I _n	all	t≥1h	non-trip	cold state	The current rise steadily to a fixed value within 5s	
1.45I _n	all	t<1h	trip	heat state		
2.55I _n	all	1s<t<60s	trip	cole state	Open the supplementary switch , connect the power	
5I _n	all	t≥0.1s	non-trip	cold state		
10I _n	all	t<0.1s	trip	cole state		