


SUPERFLUX LEDs

Features: High Luminance output, Designed for High Current Operation, Uniform Color, Low Power Consumption, Low Thermal Resistance, Low Profile...

Typical Applications: Automotive Exterior Lighting, Electronic Signs and Signals, Specialty Lighting...

Kingbright




Part No.	Colour	Viewing Angle	Luminous Intensity
L-7676 CPBC-Z	blue 470nm	70°	4300mcd/20mA
L-7676 CSEC	red 621nm	70°	600mcd/20mA
L-7676 CSEC-E	red 621nm	70°	800mcd/20mA
L-7676 CSEC-G	red 625nm	70°	1200mcd/20mA
L-7676 CSEC-H	red 630nm	70°	1800mcd/20mA
L-7676 CSURC	red 628nm	70°	500mcd/20mA
L-7676 CSURC-E	red 630nm	70°	600mcd/20mA
L-7676 CSYC	orange 588nm	70°	400mcd/20mA
L-7676 CSYC-H	orange 589nm	70°	450mcd/20mA
L-7676 CVGC-Z	green 525nm	70°	4300mcd/20mA
VLWW9600	white	60°	4pin

Part No.	Ord. No.	1+	5+	25+
S L-7676 CPBC-Z	62618	0,790	0,740	0,674
S L-7676 CSEC	45256	0,247	0,226	0,211
S L-7676 CSEC-E	12674	0,262	0,239	0,223
S L-7676 CSEC-G	45249	0,304	0,285	0,267
S L-7676 CSEC-H	45250	0,378	0,355	0,332
O L-7676 CSURC	45255	0,273	0,243	0,222
S L-7676 CSURC-E	12673	0,339	0,319	0,298
S L-7676 CSYC	45254	0,238	0,218	0,203
S L-7676 CSYC-H	47116	0,342	0,322	0,301
S L-7676 CVGC-Z	62617	0,999	0,936	0,853
S VLWW9600	62621	0,790	0,740	0,674

2mA Low Current LEDs

3mm Low Current Series

Kingbright

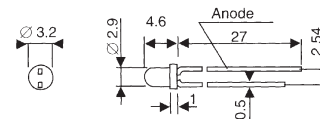


Part No.	Colour	Viewing Angle	Luminous Intensity
L-934 LID	red	60°	3mcd
L-934 LSRD	red	60°	20mcd
L-934 LYD	yellow	60°	2mcd
L-934 LGD	green	60°	2mcd

Part No.	Ord. No.	1+	25+	100+
S L-934 LID	12233	0,083	0,056	0,052
S L-934 LSRD	12391	0,049	0,036	0,033
S L-934 LYD	12257	0,083	0,055	0,051
S L-934 LGD	12232	0,083	0,055	0,051

5mm Low Current Series

Kingbright

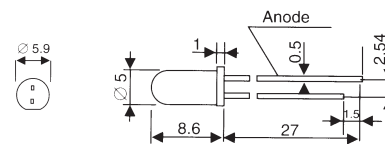

Part No.	Colour	Viewing Angle	Luminous Intensity
L-53 LID	red	60°	5mcd
L-53 LSRD	red	60°	20mcd
L-53 LYD	yellow	60°	2mcd
L-53 LGD	green	60°	2mcd


Part No.	Ord. No.	5+	100+	500+
S L-53 LID	12189	0,049	0,036	0,032
S L-53 LSRD	12246	0,049	0,039	0,035
S L-53 LYD	12343	0,049	0,033	0,030
S L-53 LGD	12223	0,083	0,055	0,051

Blinking LEDs

Led with integrated chip for blinking. Supply voltage from 3,5V, typically 9-12V.

3mm Blinking LEDs Series

Kingbright

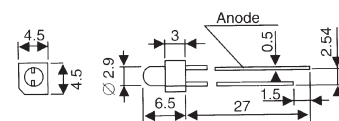

Part No.	Colour	Viewing Angle	Luminous Intensity [mcd@9V]	U _f [max.V/mA]
L-616 BHD	red	60°	2	13/44
L-616 BGD	green	60°	15	13/20
L-616 BYD	yellow	60°	10	13/20

Part No.	Ord. No.	1+	5+	25+
S L-616 BHD	11974	0,398	0,367	0,336
O L-616 BGD	12018	0,398	0,367	0,336
O L-616 BYD	12019	0,398	0,367	0,336