


# Specification

Product Model	YTTS1-PV			
Pole	2P		3P	
Rated Frequency	One port			
SPD Category	Combined type			
Test Category	Class II test			
Colour	Green	White	Green	White
Maximum Continuous Operating Voltage Uc	600VDC 1000VDC		1000VDC 1500VDC	
Voltage Protection Level Up(8/20μs)	≤3.2kV		≤3.2kV	
Nominal Discharge Current In(8/20μs)	20kA		20kA	
Maximum Discharge Current I <sub>max</sub> (8/20μs)	40kA		40kA	
Response Time tA	≤25ns			
Size	36x90x66		54x90x66	
Failure Indication	Green: Normal Red: Failure			
Sectional Area Of Wires	6~25mm <sup>2</sup>			
Installation Method	35mm standard rail			
Working Environment Temperature	-40°C ~+85°C			
Sheathing Material	Plastic			
Protection Level	IP20			
Executive Standard	IEC 61643-31			

# / Product dimensions /

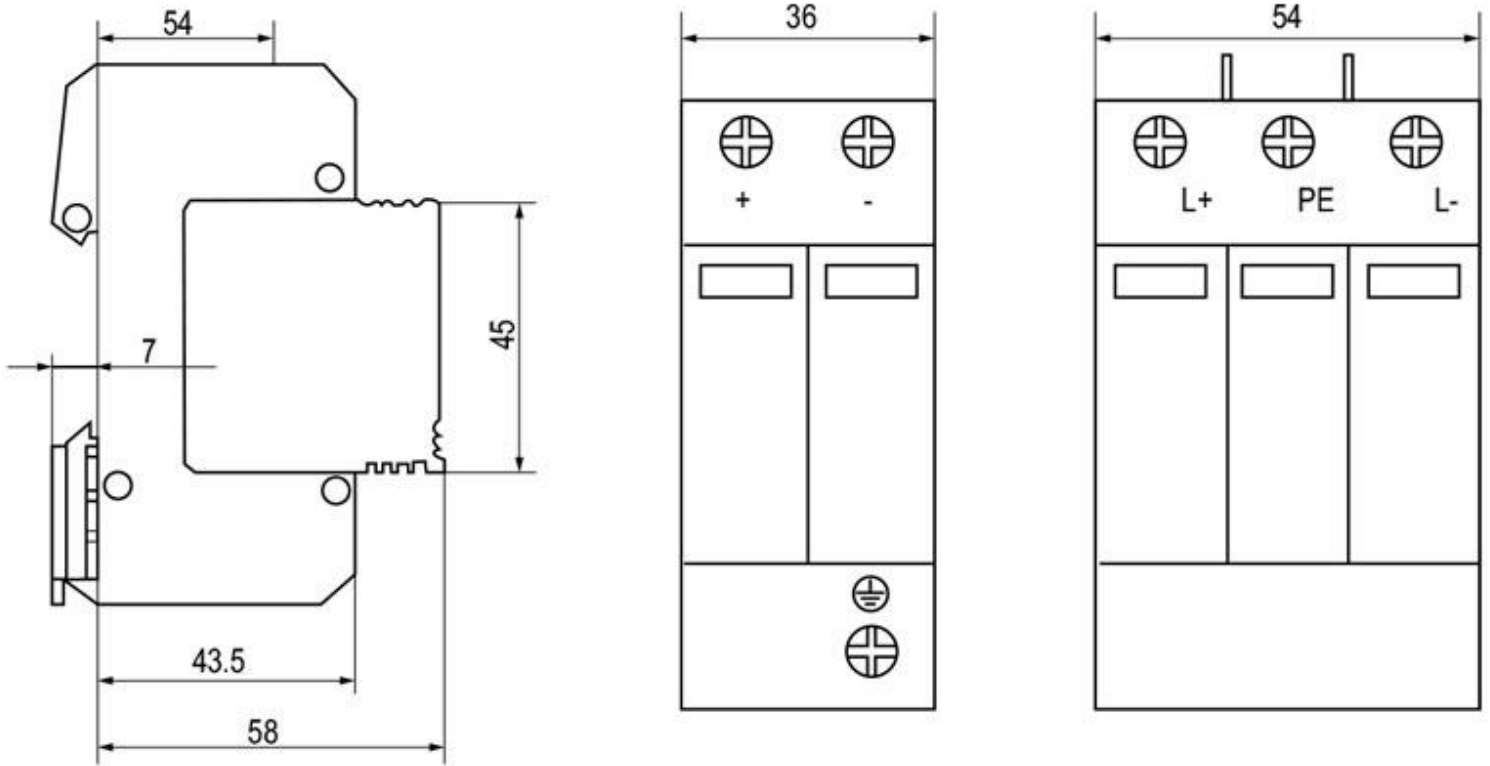

# / Wiring Diagram /

