


REVISIONS			
REV	DESCRIPTION	DATE	BY

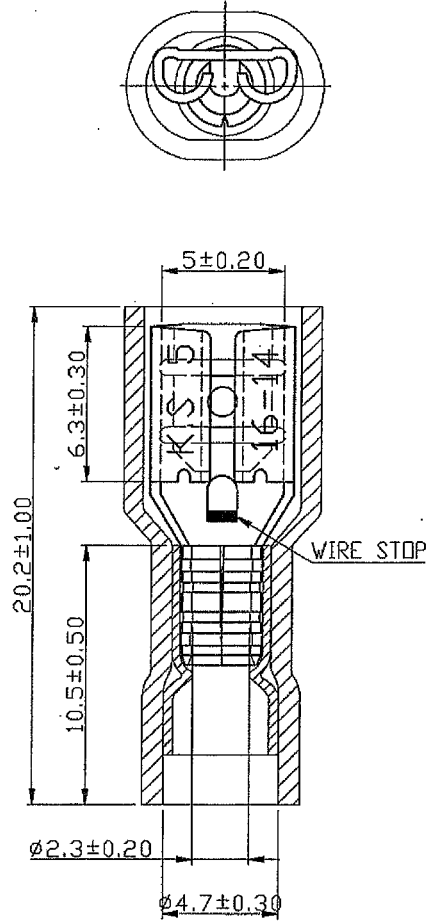

MAXIMUM ELECTRIC CURRENT:

A.W.G	16	14	
AMP.	10	15	

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

康揚符合歐盟ROHS規範 (K.Y. Accord EU RoHS Compliant)	
★鉛Pb	<1000PPM
★鎘Cd	< 100PPM
★汞Hg	<1000PPM
★六價鉻Cr6+	<1000PPM
★多溴聯苯類PBBs	<1000PPM
★多溴聯苯醚類PBDEs	<1000PPM
★有鹵料件 Halogen-containing Product	

NEMA TAB	TERMINAL THICKNESS	UNIT
0.5X2.8	0.35	mm



康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN)CO.,LTD. <small>ISO 9001 ISO 14001 QC 080000</small> 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD.				TITLE VINYL-FULLY INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS		SPEC. DWG.	
				TERMINAL MAT'L BRASS WITH TIN PLATED		DATE 2003.07.30	
PART NUMBER FDFD2-1875		DRAWING NUMBER FDFD2-1875		INSULATION MAT'L VINYL		CHECK 	
SIZE A4		SCALE NONE		COLOR BLUE		APPROVED 	
UNIT mm		REV A		UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.2			