
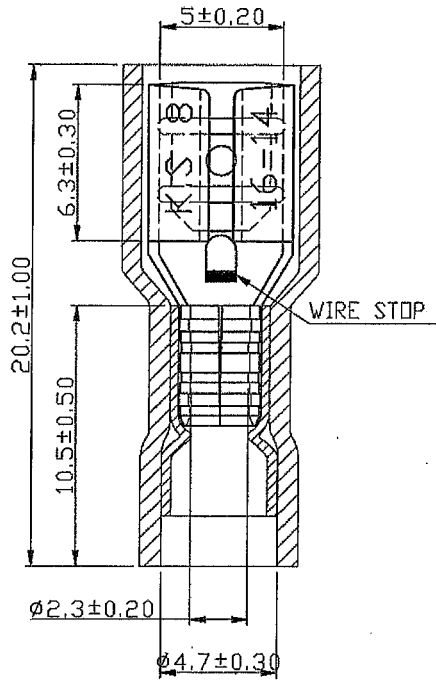


REVISIONS			
REV	DESCRIPTION	DATE	BY



MAXIMUM ELECTRIC CURRENT:

A.W.G	16	14	
AMP.	10	15	

MAXIMUM ELECTRICAL RATING: 105°C 600 VOLTS MAX.

康揚符合歐盟ROHS規範 (K.Y. Accord EU RoHS Compliant)	
★ 鉛Pb	<1000PPM
★ 鎘Cd	< 100PPM
★ 汞Hg	<1000PPM
★ 六價鉻Cr6+	<1000PPM
★ 多溴聯苯類PBBS	<1000PPM
★ 多溴聯苯醚類PBDEs	<1000PPM
★ 有鹵料件 Halogen-containing Product	

NEMA TAB	TERMINAL THICKNESS	UNIT
0.8X4.75	0.35	mm



康揚企業股份有限公司 KANG YANG HARDWARE ENTERPRISE CO., LTD. 康揚塑膠(東莞)有限公司 KANG YANG PLASTIC(DONG GUAN)CO.,LTD. <small>ISO 9001 ISO 14001 QC 080000</small> 康哲電腦配件(吳江)有限公司 KANG CHE COMPUTER COMPONENTS(WUJIANG) CO.,LTD.	TITLE VINYL-FULLY INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS	SPEC. DWG.
	TERMINAL MAT'L BRASS WITH TIN PLATED	DATE 2003.07.30
	INSULATION MAT'L VINYL	DRAWN FU
	COLOR BLUE	CHECK
PART NUMBER FDFD2-1878	DRAWING NUMBER FDFD2-1878	UNLESS OTHERWISE SPECIFIED TOLERANCE ±0.2
SIZE A4	SCALE NONE	UNIT mm
		REV A
		APPROVED