


1 RoHS Compliant







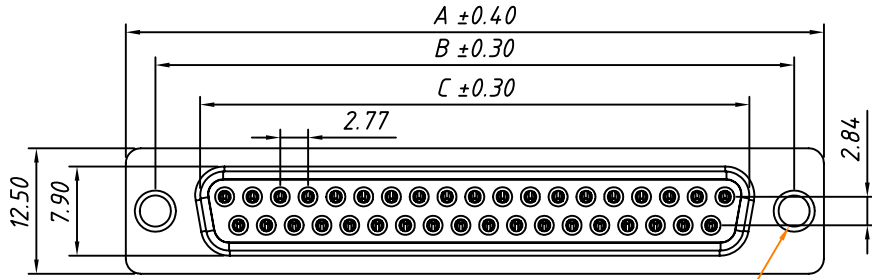


#4-40 UNC

Number of Contacts	DIMENSION		
	A±0.40	B±0.30	C±0.30
09	30.90	24.99	16.30
15	39.20	33.0500 0	24.60
25	53.10	47.04	38.30
37	69.40	63.50	54.80

Material:
Housing: PBT+30% Glass filled ,UL 94V-0
Contacts: Brass ,Gold Plating
Shell: Steel, Nickel Plating

Electrical Characteristics:
Current Rating: 1 AMP
Insulator Resistance: 1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) for 1 minute
Contact Resistance: 20mΩ Max. Initial
Operating Temperature: -40°C ~ +105°C

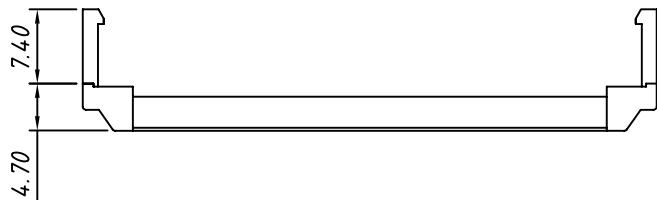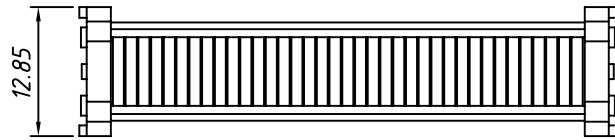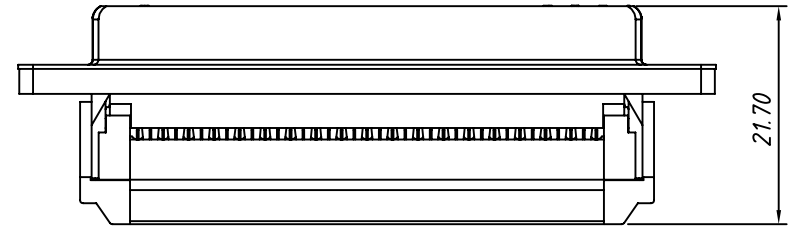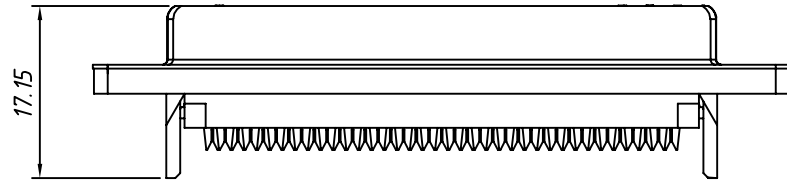

Order Information


L - KLS1 -222B- XX- F - L


RoHS

D-SUB Connector,
IDC Type, Type: 222B, 222BN
XX-No. of 09,15,25,37pins


Connector type: M-Male F-Female

Housing Color: B-Black L-Blue

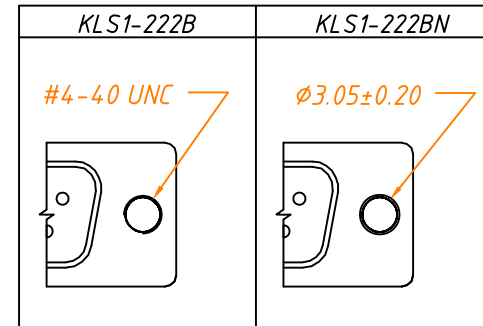

GENERAL TOLERANCE	PROJECTION	Symbol	Description:
X. ±0.30	UNITS	mm	D-SUB Connector, IDC Type, Female KLS P/N: L-KLS1-222B-XX-F-L
.X ±0.25	SCALE	1:1	
.XX ±0.20	Draw by:	Daniel	
ANGLE TOLERANCE	Check by:	Daniel	 NingBo KLS ELECTRONIC CO.,L TD.
X. ±3°	Date	2018-03-01	
.X ±2°	SHEET	1 OF 1	
.XX ±1°			

1 RoHS Compliant






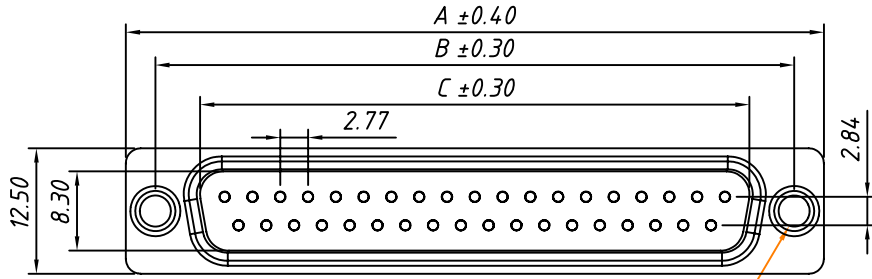


#4-40 UNC

Number of Contacts	DIMENSION		
	A±0.40	B±0.30	C±0.30
09	30.90	24.99	16.90
15	39.20	33.05	25.25
25	53.10	47.04	38.96
37	69.40	63.50	55.42

Material:
Housing: PBT+30% Glass filled ,UL 94V-0
Contacts: Brass ,Gold Plating
Shell: Steel, Nickel Plating

Electrical Characteristics:
Current Rating: 1 AMP
Insulator Resistance: 1000MΩ Min. at DC 500V
Withstanding Voltage: 500V AC (rms) for 1 minute
Contact Resistance: 20mΩ Max. Initial
Operating Temperature: -40°C ~ +105°C

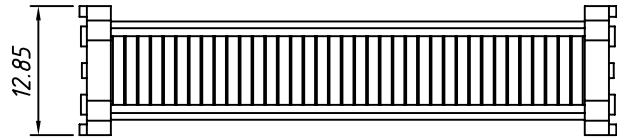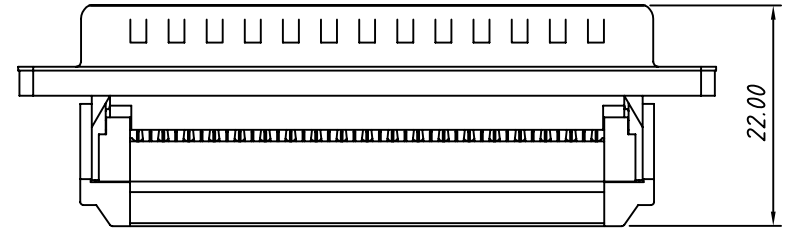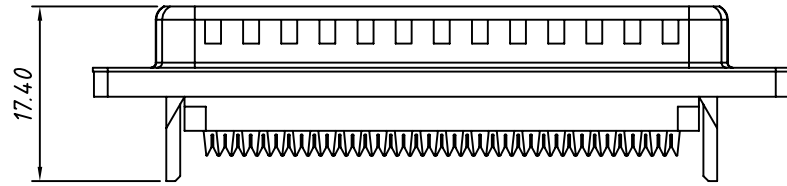

Order Information

L - KLS1 -222B- XX- M - L


RoHS


D-SUB Connector,
IDC Type, Type: 222B , 222BN

XX-No. of 09,15,25,37pins

Connector type: M-Male F-Female

Housing Color: B-Black L-Blue

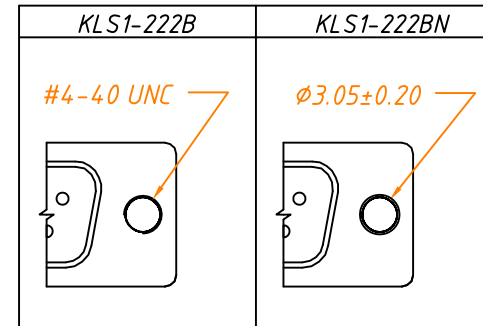

GENERAL TOLERANCE	PROJECTION	Symbol	Description:
X. ±0.30	UNITS	mm	D-SUB Connector, IDC Type, Male
.X ±0.25	SCALE	1:1	
.XX ±0.20	Draw by:	Daniel	
ANGLE TOLERANCE	Check by:	Daniel	KLS P/N: L-KLS1-222B-XX-M-L
X. ±3°	Date	2018-03-01	 NingBo KLS ELECTRONIC CO.,L TD.
.X ±2°	SHEET	1 OF 1	
.XX ±1°			