

## DIP Switch Series

KLS7-DST DIP Switch Pitch 2.54mm

### Material:


Cover: PBT plastic (red or blue)  
Base: PBT plastic (black)  
Operator: POM plastic (white)  
Stock: epoxy resin potting  
Terminal: tin plated phosphor bronze, contact gold plated 3u"  
Sealing tape: polyimide KAPTON

### Switching Characteristics:

Switch Capacity: 25mA at 24VDC  
Insulation Resistance: 100MΩ at 250VDC  
Contact Resistance: 50mΩ max.  
Insulation strength: 500VAC / 1min  
Operation Force : 1000gf max.  
Electrical life: 2000 times  
Operation Temp:-20°C~+70°C

### Welding requirements:

Manual welding: 320°C no more than 2 seconds.  
(30 watt iron max.)  
Wave soldering: 260°C no more than 5 seconds, in the  
welding and cleaning process of the switch is in the off state

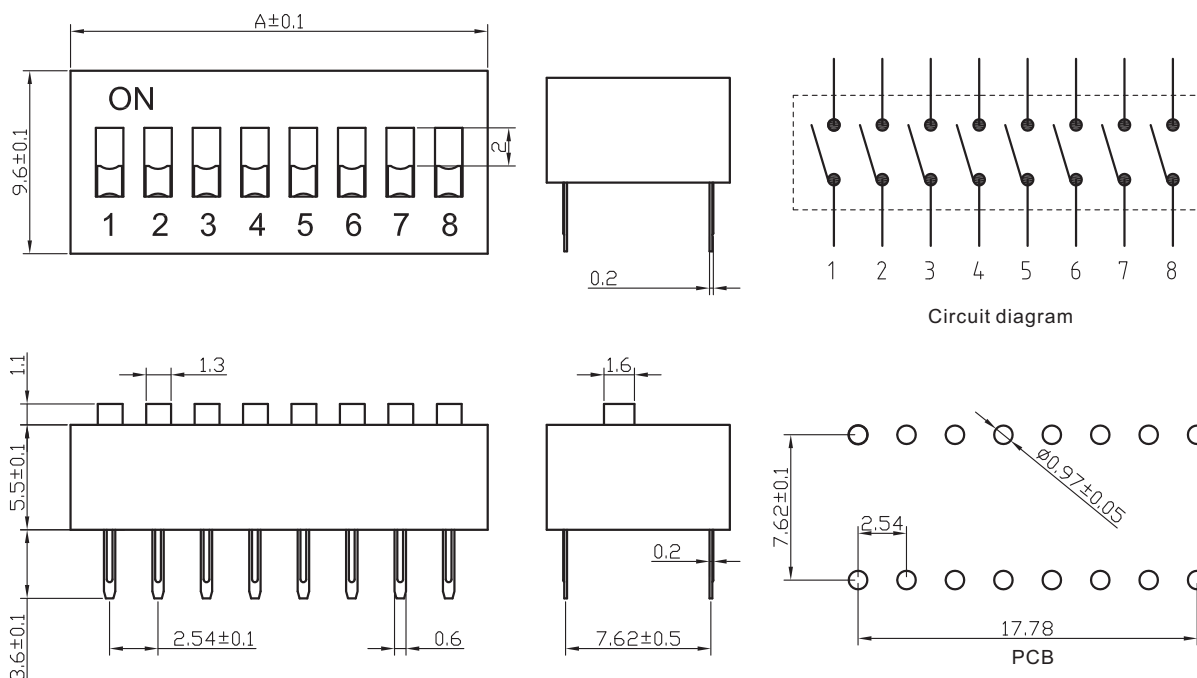

switch pins	2	3	4	5	6	7	8	9	10	12
A size (mm)	6.64	9.18	11.72	14.26	16.8	19.34	21.88	24.42	26.96	32.04

## ORDER INFORMATION

