


RoHS

REVISION DATE		
ITEM	DESCRIPTION	DATE
A	Issue	2013 05 08



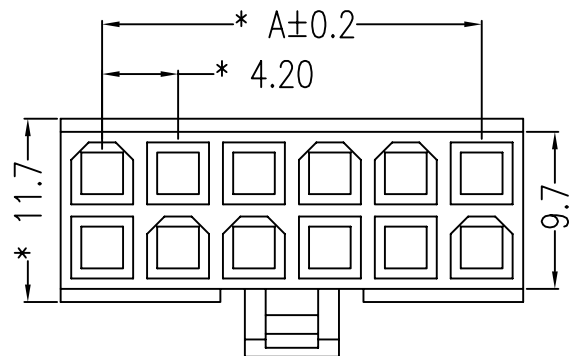


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25°C~+85°C

■ HOUSING

- Material: Nylon 66 UL 94V-0
Nylon 66 UL 94V-2

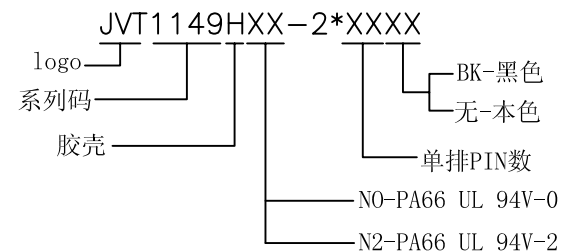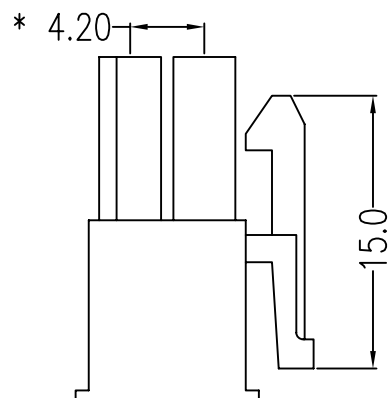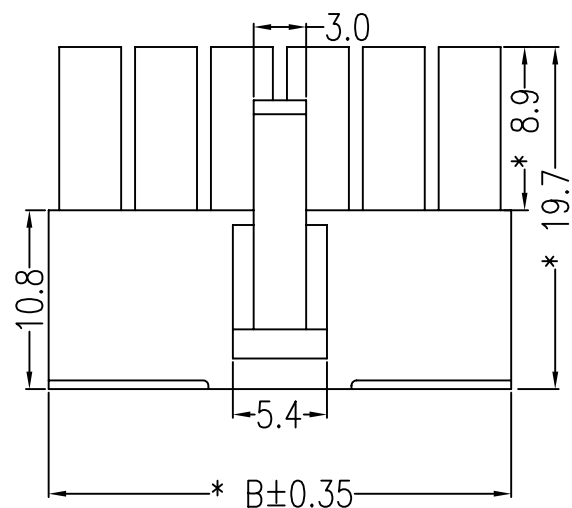

Poles	Dimensions in.(mm)		Poles	Dimensions in.(mm)	
	A	B		A	B
2*2	4.20	9.7	2*8	29.40	34.9
2*3	8.40	13.9	2*9	33.60	39.1
2*4	12.60	18.1	2*10	37.80	43.3
2*5	16.80	22.3	2*11	42.00	47.5
2*6	21.00	26.5	2*12	46.20	51.7
2*7	25.20	30.7			

投影 (PROJECT)		公差 (TOLERANCE)
单位 (UNIT)	mm	0 ±0.40
比例 (SCALE)	FIT	0.0 ±0.30
版本 (EDITION)	A.0	0.00 ±0.20
日期 (DATE)	2013 07 12	0.000 ±0.05

东莞市乔业电子有限公司
DONG GUAN CHYAO YEE (JVT) CONNECTORS CO., LTD.

绘图 (DRAWN)	TONY	品号 (PART NO)	JVT1149HXX-2*XXXX	页次 (PAGE)	
审核 (CHECKED)	CHEN	图号 (DRAW NO)	044-1149-01	1/1	
核准 (APPROVE)		品名 (NAME)	MLX 4.2 双排公 HSG		