

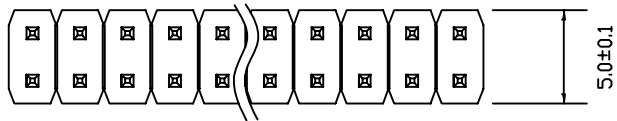


A B C D E F G H

1

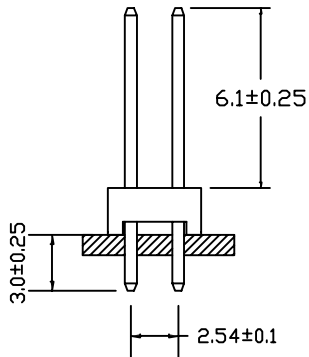

2

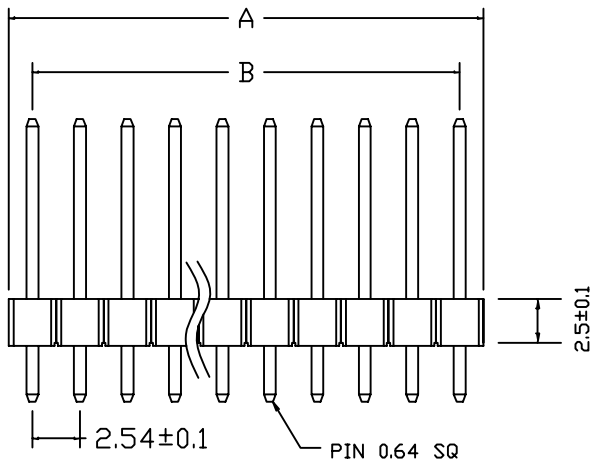

SPECIFICATIONS

Material:

Insulator:Glass filled PBT (UL94V-0),Black

Contacts:Brass

Contact Plating:Gold or Sn over 50u'' Ni

Plating:0.8u'' Au

Electrical Characteristics:

Contact Resistance:20mΩ Max.

Insulator Resistance:1000MΩ Min.

Withstanding Voltage:AC 500V

Current Rating:3 AMP

Operating Temperature:-40℃ to +105℃

JVT2547H25-2*XX-U61D30


胶壳高度H2.5

D30-下针长3.00mm (U-UP)

单排PIN数

U61-上针长6.10mm (U-UP)

3

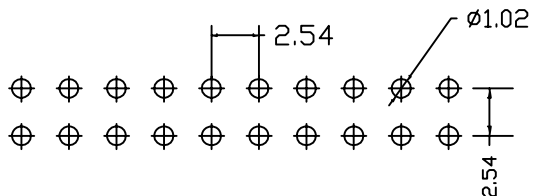

PCB LAYOUT

Position Dimension	1 Thru 40
A±0.30	2.54 * No. of Positions
B±0.20	2.54 * No. of Contacts-2.54

4

GENERAL TOLERANCE	
0	±0.40
.0	±0.30
.00	±0.20
.000	±0.10

版本	变更内容	日期		单位	mm	比例	1:1	日期	20140512
----	------	----	--	----	----	----	-----	----	----------

乔业电子有限公司
CHYAO YEE CONNECTORS CO., L TD

核准	审核	绘图	品名	2.54mm 双排排针 180° H=2.5		
	陈宁亮	李勇军	料号	JVT2547H25-2*XX-U61D30		
			图名	101	版本	A

A B C D E F G H