



- High efficiency 94% and low power dissipation
- 150% peak load capability
- Built-in active PFC function, PF>0.93
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508 (industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- · Built-in DC OK relay contact
- 100% full load burn-in test
- · 3 years warranty









### **SPECIFICATION**


MODEL		SDR-240-24	SDR-240-48	
	DC VOLTAGE	24V	48V	
ОИТРИТ	RATED CURRENT	10A	5A	
	CURRENT RANGE	0 ~ 10A	0 ~ 5A	
	RATED POWER	240W	240W	
	PEAK CURRENT	15A	7.5A	
	PEAK POWER Note.6	360W (3sec.)	·	
	RIPPLE & NOISE (max.) Note.2	100mVp-p	120mVp-p	
	VOLTAGE ADJ. RANGE	24 ~ 28V	48 ~ 55V	
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	
	LINE REGULATION	±0.5%	±0.5%	
	LOAD REGULATION	±1.0%	±1.0%	
	SETUP, RISE TIME	1500ms, 60ms/230VAC 3000ms, 60ms/115VAC at full loa	ad	
	HOLD UP TIME (Typ.)	20ms/230VAC 20ms/115VAC at full load		
	VOLTAGE RANGE	88 ~ 264VAC 124 ~ 370VDC		
	FREQUENCY RANGE	47 ~ 63Hz		
	POWER FACTOR (Typ.)	0.93/230VAC 0.99/115VAC at full load		
NPUT	EFFICIENCY (Typ.) Note.8	94%		
	AC CURRENT (Typ.)	2.6A/115VAC 1.3A/230VAC		
	INRUSH CURRENT (Typ.)	33A/115VAC 65A/230VAC		
	LEAKAGE CURRENT	<1mA / 240VAC		
	OVERLOAD	Normally works within 110 ~ 150% rated output power for more	ormally works within 110 ~ 150% rated output power for more than 3 seconds and then shut down o/p voltage with auto-recovery	
	OVERLOAD	>150% rated power, constant current limiting with auto-recovery within 2 seconds and may cause to shut down if over 2 seconds		
	OVER VOLTAGE	29 ~ 33V	56 ~ 65V	
ROTECTION		Protection type : Shut down o/p voltage with auto-recovery		
	OVER TEMPERATURE	95°C ±5°C (TSW : detect on heatsink of power switch)		
		Protection type : Shut down o/p voltage, recovers automatically after temperature goes down		
UNCTION	DC OK REALY CONTACT RATINGS (max.)	60Vdc/0.3A, 30Vdc/1A, 30Vac/0.5A resistive load		
	WORKING TEMP. Note.5	-25 ~ +70°C (Refer to output load derating curve)		
	WORKING HUMIDITY	20 ~ 95% RH non-condensing		
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH		
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)		
	VIBRATION	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6		
	SAFETY STANDARDS	UL508, TUV EN60950-1 approved		
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC		
SAFETY &	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25°C / 70% RH		
EMC (Note 4)	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B		
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3		
	EMS IMMUNITY	$Compliance \ to \ EN61000-4-2, 3, 4, 5, 6, 8, 11, \ ENV50204, \ EN55024, \ EN61000-6-2 \ (EN50082-2), \ EN61204-3, \ heavy \ industry \ level, \ criteria\ A, \ SEMI\ F47, \ GL\ approved$		
	MTBF	169.3Khrs min. MIL-HDBK-217F (25°C)		
OTHERS	DIMENSION	63*125.2*113.5mm (W*H*D)		
ļ	PACKING	1.03Kg; 12pcs/13.4Kg/1.06CUFT		
NOTE	2. Ripple & noise are measure	ly mentioned are measured at 230VAC input, rated load and at 20MHz of bandwidth by using a 12" twisted pair-wire tel tolerance, line regulation and load regulation.		


- Tolerance: includes set up tolerance, line regulation and load regulation.
- 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.
- 5. Installation clearances: 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended.
- 6. 3 seconds max., please refer to peak loading curves.
- 7. Derating may be needed under low input voltage. Please check the derating curve for more details.
- 8. After 30 minutes of burn-in.





## ■ Mechanical Specification


Case No. 979A Unit:mm












ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15




## Terminal Pin No. Assignment (TB1)

Pin No.	Assignment
1	FG 🖶
2	AC/N
3	AC/L

### Terminal Pin No. Assignment (TB2)

Pin No.	Assignment
1,2	Relay Contact
3,4	DC OUTPUT +V
5,6	DC OUTPUT -V

# ■ Block Diagram

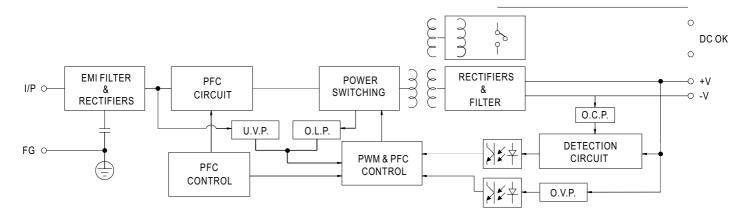



## **■** DC OK Relay Contact

Contact Close	When the output voltage reaches the adjusted output voltage.
Contact Open	When the output voltage drop below 90% output voltage.
Contact Ratings (max.)	30V/1A resistive load




# ■ Peak Loading

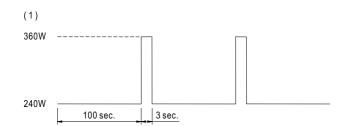



# ■ Derating Curve

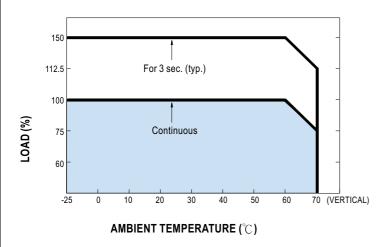

# ■ Output derating VS input voltage

