

# NTC thermistors for temperature measurement

Leaded NTC thermistors, lead spacing 5 mm

Series/Type: B57164K
Date: March 2013

© EPCOS AG 2013. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



Temperature measurement and compensation

B57164K

#### Leaded NTC thermistors, lead spacing 5 mm

K164

#### **Applications**

Temperature measurement and compensation


#### **Features**

- Wide resistance range
- Cost-effective
- Lacquer-coated thermistor disk
- Tinned copper leads
- Lead spacing 5 mm
- Marked with resistance and tolerance

#### **Delivery mode**

Bulk (standard), cardboard tape, reeled or in Ammo pack on request

#### **Dimensional drawing**



\* May be free of lacquer

Dimensions in mm Approx. weight 0.4 g

#### General technical data

Climatic category	(IEC 60068-1)		55/125/21	
Max. power	(at 25 °C)	P <sub>25</sub>	450	mW
Resistance tolerance		$\Delta R_R/R_R$	±5, ±10	%
Rated temperature		$T_R$	25	°C
Dissipation factor	(in air)	$\delta_{\text{th}}$	approx. 7.5	mW/K
Thermal cooling time constant	(in air)	$ au_{ m c}$	approx. 20	s
Heat capacity		$C_{th}$	approx. 150	mJ/K



Temperature measurement and compensation	B57164K
Leaded NTC thermistors, lead spacing 5 mm	K164

## Electrical specification and ordering codes

R <sub>25</sub>	No. of R/T	B <sub>25/100</sub>	Ordering code
Ω	characteristic	К	
15	1203	2900 ±3%	B57164K0150+000
22	1203	2900 ±3%	B57164K0220+000
33	1203	2900 ±3%	B57164K0330+000
47	1302	3000 ±3%	B57164K0470+000
68	1303	3050 ±3%	B57164K0680+000
100	1305	3200 ±3%	B57164K0101+000
150	1305	3200 ±3%	B57164K0151+000
220	1305	3200 ±3%	B57164K0221+000
330	1306	3450 ±3%	B57164K0331+000
470	1306	3450 ±3%	B57164K0471+000
680	1307	3560 ±3%	B57164K0681+000
1 k	1011	3730 ±3%	B57164K0102+000
1.5 k	1013	3900 ±3%	B57164K0152+000
2.2 k	1013	3900 ±3%	B57164K0222+000
3.3 k	4001	3950 ±3%	B57164K0332+000
4.7 k	4001	3950 ±3%	B57164K0472+000
6.8 k	2903	4200 ±3%	B57164K0682+000
10 k	2904	4300 ±3%	B57164K0103+000
15 k	1014	4250 ±3%	B57164K0153+000
22 k	1012	4300 ±3%	B57164K0223+000
33 k	1012	4300 ±3%	B57164K0333+000
47 k	4003	4450 ±3%	B57164K0473+000
68 k	2005	4600 ±3%	B57164K0683+000
100 k	2005	4600 ±3%	B57164K0104+000
150 k	2005	4600 ±3%	B57164K0154+000
220 k	2007	4830 ±3%	B57164K0224+000
330 k	2006	5000 ±3%	B57164K0334+000
470 k	2006	5000 ±3%	B57164K0474+000

<sup>+ =</sup> Resistance tolerance

 $J = \pm 5\%$  $K = \pm 10\%$ 



Temperature measurement and compensation	B57164K
Leaded NTC thermistors, lead spacing 5 mm	K164

#### Reliability data

Test	Standard	Test conditions	$\Delta R_{25}/R_{25}$ (typical)	Remarks
Storage in dry heat	IEC 60068-2-2	Storage at upper category temperature T: 125 °C t: 1000 h	< 3%	No visible damage
Storage in damp heat, steady state	IEC 60068-2-78	Temperature of air: 40 °C Relative humidity of air: 93% Duration: 21 days	< 3%	No visible damage
Rapid temperature cycling	IEC 60068-2-14	Lower test temperature: -55 °C Upper test temperature: 125 °C Number of cycles: 10	< 3%	No visible damage
Endurance		P <sub>max</sub> : 450 mW t: 1000 h	< 3%	No visible damage
Long-term stability (empirical value)		Temperature: 70 °C t: 10000 h	< 5%	No visible damage

#### Note

- Contact of NTC thermistors with any liquids and solvents shall be prevented. It must be ensured that no water enters the NTC thermistors (e.g. through plug terminals).
- Avoid dewing and condensation unless thermistor is specified for these conditions.



Temperature measurement and compensation	B57164K
Leaded NTC thermistors, lead spacing 5 mm	K164

R/T No.	1011		1012		1013	
T (°C)	$B_{25/100} = 3730 \text{ K}$		B <sub>25/100</sub> = 4300 K		B <sub>25/100</sub> = 3900 K	
	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)
-55.0	70.014	6.9	87.237	6.8	77.285	7.0
-50.0	49.906	6.7	62.264	6.7	54.938	6.7
-45.0	36.015	6.4	44.854	6.5	39.507	6.5
-40.0	26.296	6.2	32.599	6.3	28.722	6.3
-35.0	19.411	6.0	23.893	6.1	21.099	6.1
-30.0	14.479	5.8	17.654	6.0	15.652	5.9
-25.0	10.903	5.6	13.098	5.8	11.715	5.7
-20.0	8.2923	5.4	9.8059	5.7	8.8541	5.6
-15.0	6.3591	5.2	7.4266	5.5	6.7433	5.4
-10.0	4.9204	5.1	5.6677	5.4	5.1815	5.2
-5.0	3.8279	4.9	4.3213	5.3	4.0099	5.1
0.0	3.0029	4.8	3.3208	5.1	3.1283	4.9
5.0	2.3773	4.6	2.5842	5.0	2.4569	4.8
10.0	1.8959	4.5	2.0238	4.9	1.9438	4.6
15.0	1.5207	4.3	1.5858	4.8	1.5475	4.5
20.0	1.228	4.2	1.2507	4.7	1.2403	4.4
25.0	1.0000	4.1	1.0000	4.5	1.0000	4.3
30.0	0.81779	3.9	0.7964	4.4	0.81104	4.1
35.0	0.67341	3.8	0.64053	4.3	0.66146	4.0
40.0	0.55747	3.7	0.51772	4.2	0.54254	3.9
45.0 50.0 55.0 60.0 65.0	0.46357 0.3874 0.32368 0.272 0.23041	3.6 3.5 3.4 3.3	0.41958 0.34172 0.27877 0.22861 0.18872	4.1 4.0 3.9 3.8	0.44727 0.37067 0.30865 0.25825 0.21707	3.8 3.7 3.6 3.5 3.4
70.0	0.19604	3.2	0.15645	3.7	0.18323	3.3
75.0	0.16735	3.1	0.13012	3.6	0.15535	3.3
80.0	0.14342	3.0	0.10863	3.6	0.13223	3.2
85.0	0.12347	3.0	0.091115	3.5	0.11302	3.1
90.0	0.10668	2.8	0.0767	3.4	0.096951	3.0
95.0	0.092734	2.8	0.064867	3.3	0.083487	3.0
100.0	0.080903	2.8	0.055047	3.3	0.072139	2.9
105.0	0.070616	2.7	0.046797	3.2	0.062559	2.8
110.0	0.061826	2.6	0.039904	3.1	0.054425	2.8
115.0	0.054282	2.6	0.034255	3.1	0.047508	2.7
120.0	0.047793	2.5	0.029498	3.0	0.041594	2.6
125.0	0.042249	2.4	0.025448	3.0	0.036532	2.6



K164

Temperature measurement and compensation	
Leaded NTC thermistors, lead spacing 5 mm	

R/T No.	1014		1203		1302	
T (°C)	$B_{25/100} = 4250 \text{ K}$	ĺ.	$B_{25/100} = 2900 \text{ K}$	(	B <sub>25/100</sub> = 3000 K	
	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)
-55.0	83.935	6.8	30.252	5.6	33.701	5.9
-50.0	60.228	6.6	22.966	5.4	25.252	5.7
-45.0	43.593	6.4	17.612	5.2	19.149	5.4
-40.0	31.815	6.3	13.65	5.0	14.684	5.2
-35.0	23.404	6.1	10.671	4.8	11.38	5.0
-30.0	17.349	6.0	8.4216	4.7	8.9067	4.8
-25.0	12.946	5.8	6.7001	4.5	7.0357	4.6
-20.0	9.7439	5.7	5.3757	4.3	5.6065	4.5
-15.0	7.3737	5.5	4.3443	4.2	4.5044	4.3
-10.0	5.6247	5.4	3.5376	4.1	3.6471	4.2
-5.0	4.3063	5.3	2.8995	3.9	2.9746	4.0
0.0	3.3221	5.2	2.3929	3.8	2.4429	3.9
5.0	2.5779	5.0	1.9866	3.7	2.0194	3.8
10.0	2.0144	4.9	1.6596	3.5	1.6797	3.6
15.0	1.5848	4.8	1.3941	3.4	1.4053	3.5
20.0	1.2547	4.6	1.1777	3.3	1.1823	3.4
25.0	1.0000	4.6	1.0000	3.2	1.0000	3.3
30.0	0.79913	4.4	0.85337	3.1	0.85007	3.2
35.0	0.64287	4.3	0.7317	3.0	0.72608	3.1
40.0	0.51991	4.2	0.63032	2.9	0.623	3.0
45.0	0.42299	4.1	0.54534	2.9	0.53685	2.9
50.0	0.34573	4.1	0.47384	2.8	0.46453	2.9
55.0	0.28298	4.0	0.41336	2.7	0.40357	2.8
60.0	0.23277	3.8	0.36201	2.6	0.35193	2.7
65.0	0.19262	3.8	0.31822	2.5	0.30799	2.6
70.0	0.16005	3.7	0.28073	2.5	0.27047	2.6
75.0	0.13349	3.6	0.2485	2.4	0.23832	2.5
80.0	0.11175	3.5	0.22069	2.3	0.21067	2.4
85.0	0.093934	3.5	0.19663	2.3	0.18677	2.4
90.0	0.079231	3.4	0.17572	2.2	0.16607	2.3
95.0	0.067054	3.3	0.1575	2.2	0.14805	2.3
100.0	0.056932	3.2	0.14157	2.1	0.13233	2.2
105.0	0.048591	3.1	0.1276	2.1	0.11862	2.2
110.0	0.041605	3.1	0.11531	2.0	0.1066	2.1
115.0	0.035653	3.1	0.10447	2.0	0.096009	2.1
120.0	0.030636	3.0	0.094881	1.9	0.086667	2.0
125.0	0.026454	2.9	0.086371	1.9	0.078398	2.0



ı	Temperature measurement and compensation	

## Leaded NTC thermistors, lead spacing 5 mm

K164

R/T No.	1303		1305		1306	
T (°C)	$B_{25/100} = 3050 \text{ K}$	<sub>1/100</sub> = 3050 K		B <sub>25/100</sub> = 3200 K		<u> </u>
	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)
-55.0	34.363	5.8	42.131	6.2	49.935	6.3
-50.0	25.827	5.6	31.129	5.9	36.64	6.1
-45.0	19.635	5.4	23.273	5.7	27.18	5.9
-40.0	15.089	5.2	17.592	5.5	20.37	5.7
-35.0	11.712	5.0	13.438	5.3	15.416	5.5
-30.0	9.1774	4.8	10.366	5.0	11.775	5.3
-25.0	7.2552	4.6	8.1005	4.9	9.0698	5.1
-20.0	5.7835	4.5	6.3856	4.8	7.0497	5.0
-15.0	4.6467	4.3	5.0364	4.7	5.5187	4.8
-10.0	3.7611	4.2	4.0067	4.4	4.3558	4.7
-5.0	3.0547	4.1	3.2217	4.3	3.4609	4.5
0.0	2.4986	4.0	2.6097	4.2	2.7705	4.4
5.0	2.0575	3.8	2.126	4.0	2.2313	4.3
10.0	1.7051	3.7	1.7438	3.9	1.8098	4.1
15.0	1.421	3.6	1.4415	3.8	1.4762	4.0
20.0	1.191	3.6	1.1987	3.7	1.2116	3.9
25.0	1.0000	3.3	1.0000	3.5	1.0000	3.8
30.0	0.85053	3.3	0.84185	3.4	0.82984	3.7
35.0	0.72386	3.2	0.7108	3.3	0.6922	3.6
40.0	0.61897	3.1	0.60317	3.2	0.58042	3.5
45.0 50.0 55.0 60.0 65.0	0.53134 0.45814 0.39637 0.34439 0.30081	3.0 2.9 2.9 2.7 2.7	0.51419 0.44037 0.37824 0.32636 0.28333	3.1 3.0 2.9 2.8	0.48899 0.41395 0.35197 0.3006 0.2578	3.4 3.3 3.2 3.1 3.0
70.0	0.26372	2.6	0.24697	2.7	0.22197	3.0
75.0	0.23212	2.5	0.21573	2.7	0.19189	2.9
80.0	0.20501	2.5	0.18908	2.6	0.16648	2.8
85.0	0.1815	2.4	0.16649	2.5	0.14498	2.7
90.0	0.16117	2.4	0.14709	2.5	0.12669	2.7
95.0	0.1433	2.3	0.13021	2.4	0.11109	2.6
100.0	0.12775	2.2	0.1156	2.3	0.097717	2.5
105.0	0.11458	2.1	0.10301	2.3	0.086235	2.5
110.0	0.10306	2.1	0.092038	2.2	0.076325	2.4
115.0	0.092752	2.1	0.082442	2.2	0.06776	2.4
120.0	0.083677	2.0	0.074035	2.1	0.06032	2.3
125.0	0.075739	2.0	0.066701	2.1	0.053852	2.2



Tomporo	ture measurem	ant and	aamnanaatian
rempera	ture measurem	enii and	COMPENSATION

## Leaded NTC thermistors, lead spacing 5 mm

K164

R/T No.	1307		2005		2006	
T (°C)	$B_{25/100} = 3560 \text{ K}$		$B_{25/100} = 4600 \text{ K}$		$B_{25/100} = 5000 \text{ K}$	
	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)
-55.0	51.115	5.7	120.22	7.0	200.55	8.7
-50.0	38.3	5.7	85.48	6.9	131.02	8.3
-45.0	28.847	5.6	61.004	6.8	87.171	8.0
-40.0	21.842	5.5	43.712	6.7	58.988	7.7
-35.0	16.627	5.4	31.459	6.6	40.545	7.4
-30.0	12.725	5.3	22.746	6.6	28.272	7.1
-25.0	9.7859	5.2	16.49	6.4	19.997	6.9
-20.0	7.5902	5.1	12.071	6.3	14.292	6.6
-15.0	5.8918	5.0	8.8455	6.1	10.35	6.4
-10.0	4.6124	4.8	6.5446	6.0	7.5614	6.4
-5.0	3.6247	4.7	4.8852	5.8	5.5343	6.2
0.0	2.8717	4.6	3.6781	5.6	4.086	6.0
5.0	2.2929	4.4	2.7944	5.4	3.0374	5.9
10.0	1.8442	4.3	2.1391	5.3	2.276	5.7
15.0	1.4941	4.2	1.6507	5.1	1.7188	5.6
20.0	1.2183	4.0	1.2823	5.1	1.3074	5.5
25.0	1.0000	3.9	1.0000	5.0	1.0000	5.3
30.0	0.82246	3.8	0.78393	4.8	0.76988	5.2
35.0	0.68231	3.7	0.61822	4.7	0.5954	5.1
40.0	0.56909	3.6	0.49053	4.6	0.46341	4.9
45.0	0.4767	3.5	0.39116	4.5	0.36327	4.8
50.0	0.40133	3.4	0.31371	4.3	0.28636	4.8
55.0	0.33894	3.3	0.25338	4.2	0.2262	4.7
60.0	0.28769	3.2	0.20565	4.2	0.17974	4.5
65.0	0.24573	3.1	0.16762	4.1	0.1438	4.4
70.0	0.21081	3.0	0.13726	4.0	0.1156	4.3
75.0	0.18147	3.0	0.11279	3.9	0.093296	4.3
80.0	0.15682	2.9	0.093053	3.8	0.075623	4.2
85.0	0.13601	2.8	0.077177	3.7	0.061619	4.1
90.0	0.11838	2.7	0.064263	3.6	0.050414	3.9
95.0	0.10342	2.7	0.053678	3.6	0.041532	3.8
100.0	0.090648	2.6	0.044996	3.5	0.034355	3.8
105.0	0.079672	2.5	0.037917	3.4	0.028525	3.7
110.0	0.070236	2.5	0.032063	3.4	0.023774	3.7
115.0	0.062118	2.4	0.027161	3.3	0.019852	3.6
120.0	0.055093	2.4	0.023079	3.2	0.016632	3.5
125.0	0.048901	2.3	0.01968	3.2	0.014016	3.4



Temperature	measurement and	d compensation

## Leaded NTC thermistors, lead spacing 5 mm

K164

R/T No.	2007		2903		2904		
T (°C)	B <sub>25/100</sub> = 4830 K	(	$B_{25/100} = 4200 \text{ K}$	B <sub>25/100</sub> = 4200 K			
	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	
-55.0	185.87	8.4	120.03	7.7	121.46	7.4	
-50.0	123.23	8.1	82.38	7.4	84.439	7.2	
-45.0	82.888	7.8	57.248	7.2	59.243	7.1	
-40.0	56.544	7.6	40.255	7.0	41.938	6.9	
-35.0	39.061	7.3	28.627	6.7	29.947	6.7	
-30.0	27.321	7.1	20.577	6.6	21.567	6.6	
-25.0	19.326	6.8	14.876	6.4	15.641	6.3	
-20.0	13.823	6.6	10.88	6.1	11.466	6.2	
-15.0	10.001	6.4	8.0808	5.9	8.451	6.0	
-10.0	7.3067	6.4	6.0612	5.8	6.2927	5.9	
-5.0	5.3454	6.2	4.5649	5.6	4.7077	5.7	
0.0	3.9484	5.9	3.4708	5.4	3.5563	5.5	
5.0	2.9595	5.7	2.6625	5.2	2.7119	5.3	
10.0	2.2358	5.6	2.0599	5.1	2.086	5.1	
15.0	1.7001	5.4	1.6069	4.9	1.6204	5.0	
20.0	1.3021	5.4	1.2631	4.8	1.2683	4.8	
25.0	1.0000	5.2	1.0000	4.6	1.0000	4.7	
30.0	0.7756	5.0	0.79593	4.5	0.7942	4.6	
35.0	0.60507	4.9	0.63796	4.4	0.63268	4.5	
40.0	0.47498	4.8	0.51467	4.2	0.5074	4.3	
45.0	0.37533	4.7	0.41887	4.1	0.41026	4.2	
50.0	0.29823	4.6	0.34272	4.0	0.33363	4.1	
55.0	0.23763	4.5	0.28081	3.9	0.27243	4.0	
60.0	0.19041	4.4	0.23141	3.8	0.2237	3.9	
65.0	0.15356	4.3	0.19211	3.7	0.18459	3.8	
70.0	0.12442	4.2	0.16027	3.6	0.15305	3.7	
75.0	0.10131	4.1	0.13421	3.5	0.12755	3.6	
80.0	0.08286	4.0	0.11288	3.4	0.10677	3.5	
85.0	0.068004	3.9	0.095326	3.3	0.089928	3.4	
90.0	0.056032	3.8	0.080828	3.2	0.076068	3.3	
95.0	0.046379	3.8	0.068916	3.2	0.064524	3.3	
100.0	0.038533	3.7	0.058989	3.1	0.054941	3.2	
105.0	0.032169	3.6	0.050701	3.0	0.047003	3.1	
110.0	0.026952	3.5	0.043735	3.0	0.040358	3.0	
115.0	0.022658	3.4	0.037778	2.9	0.034743	3.0	
120.0	0.019111	3.3	0.032736	2.8	0.030007	2.9	
125.0	0.016201	3.3	0.028513	2.7	0.026006	2.8	
130.0	-	-	-	-	0.022609	2.8	
135.0	-	-	-	-	0.01972	2.7	
140.0	-	-	-	-	0.017251	2.6	
145.0	_	_	-	_	0.015139	2.6	
150.0	_	_	-	_	0.013321	2.5	
155.0	_	_	-	_	0.011754	2.5	



Tempera	tura mascur	ement and	compensation
I GIIINGI A	tale illeasui	ement and	i compensation

## Leaded NTC thermistors, lead spacing 5 mm

K164


R/T No.	4001		4003	
T (°C)	B <sub>25/100</sub> = 3950 K		$B_{25/100} = 4450 \text{ K}$	
	R <sub>T</sub> /R <sub>25</sub>	α (%/K)	R <sub>T</sub> /R <sub>25</sub>	α (%/K)
-55.0	88.052	7.3	103.81	6.8
-50.0	61.65	7.0	73.707	6.7
-45.0	43.727	6.8	52.723	6.6
-40.0	31.395	6.5	37.988	6.5
-35.0	22.802	6.3	27.565	6.4
-30.0	16.742	6.2	20.142	6.2
-25.0	12.367	6.0	14.801	6.1
-20.0	9.2353	5.6	10.976	5.9
-15.0	7.0079	5.4	8.1744	5.8
-10.0	5.3654	5.4	6.1407	5.7
-5.0	4.126	5.2	4.6331	5.5
0.0	3.2	5.0	3.5243	5.4
5.0	2.4986	4.9	2.6995	5.3
10.0	1.9662	4.7	2.0831	5.1
15.0	1.5596	4.6	1.6189	5.0
20.0	1.2457	4.5	1.2666	4.9
25.0	1.0000	4.4	1.0000	4.7
30.0	0.80355	4.2	0.78351	4.6
35.0	0.65346	4.1	0.62372	4.5
40.0	0.53456	4.0	0.49937	4.4
45.0	0.43966	3.9	0.40218	4.3
50.0	0.36357	3.8	0.32557	4.2
55.0	0.30183	3.7	0.26402	4.1
60.0	0.25189	3.6	0.21527	4.0
65.0	0.21136	3.5	0.17693	3.9
70.0	0.17819	3.4	0.14616	3.8
75.0	0.15089	3.3	0.12097	3.7
80.0	0.12833	3.2	0.10053	3.7
85.0	0.10948	3.1	0.083761	3.6
90.0	0.093748	3.0	0.070039	3.5
95.0	0.080764	2.9	0.058937	3.4
100.0	0.069842	2.9	0.049777	3.4
105.0	0.060455	2.9	0.042146	3.3
110.0	0.052498	2.8	0.035803	3.2
115.0	0.04574	2.7	0.030504	3.2
120.0 125.0 130.0 135.0 140.0	0.039972 0.034984 - -	2.7 2.6 - -	0.026067 0.022332 0.019186 0.016515 0.014253	3.1 3.0 3.0 2.9 2.9
145.0	_	-	0.012367	2.8
150.0	_	-	0.010758	2.8
155.0	_	-	0.0093933	2.7

K164

#### Taping and packing

## 1 Taping of SMD NTC thermistors

## 1.1 Cardboard tape for case size 0402 and 0603 (taping to IEC 60286-3)

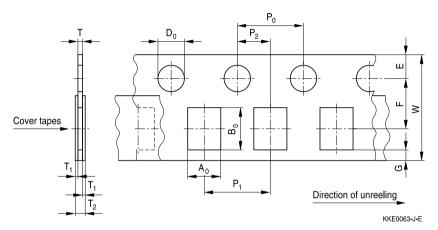


## Dimensions (mm)

	Case size 0402	Case size 0603	Tolerance
	(8-mm tape)	(8-mm tape)	
$A_0 \times B_0$	$0.60 \times 1.15$	$0.95 \times 1.80$	±0.2
$T_2$	0.70	1.10	
T	0.60	0.90	max.
$D_0$	1.50	1.50	±0.10
$P_0$	4.00	4.00	±0.10 <sup>1)</sup>
$P_2$	2.00	2.00	±0.05
P <sub>1</sub>	2.00	4.00	±0.10
W	8.00	8.00	±0.30
E	1.75	1.75	±0.10
F	3.50	3.50	±0.05
G	0.75	0.75	min.

<sup>1) ≤0.2</sup> mm over 10 sprocket holes.

K164

## 1.2 Blister tape for case size 0805 and 1206 (taping to IEC 60286-3)

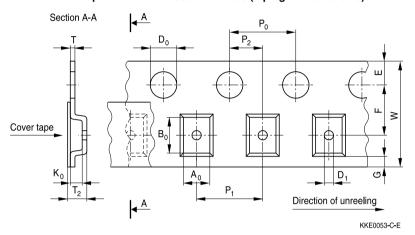


Dimensions (mm)

	Case size 0805 (8-mm tape)	Case size 1206 (8-mm tape)	Tolerance
$A_0 \times B_0$	1.60 × 2.40	1.90 × 3.50	±0.2
$K_0$	1.40	1.40	max.
T <sub>2</sub>	2.5	2.5	max.
$D_0$	1.50	1.50	+0.10/-0
$D_1$	1.00	1.00	min.
P <sub>0</sub>	4.00	4.00	±0.10 <sup>2)</sup>
$P_2$	2.00	2.00	±0.05
P <sub>1</sub>	4.00	4.00	±0.10
W	8.00	8.00	±0.30
E	1.75	1.75	±0.10
F	3.50	3.50	±0.05
G	0.75	0.75	min.

<sup>2) ≤0.2</sup> mm over 10 sprocket holes.

K164

## 1.3 Reel packing



**Packing survey** 

Case size	Chip thick- ness <sup>3)</sup>	8-mm	tape	Reel d	Reel dimensions					units
	mm			mm					pcs./reel	
		Blister	Card- board	Α	Tol.	W1	Tol.	W2	180-mm reel	330-mm reel
0402	0.5		х	180	-3/+0	8.4	+1.5/-0	14.4 max.	10000	_
0603	0.8		х	180	-3/+0	8.4	+1.5/-0	14.4 max.	4000	_
				330	±2.0	12.4	+1.5/-0	18.4 max.	_	16000
0805	0.8	х		180	-3/+0	8.4	+1.5/-0	14.4 max.	4000	16000
	1.2	х		330	±2.0	12.4	+1.5/-0	18.4 max.	3000	12000
1206	0.8	х		180	-2/+0	8.4	+1.5/-0	14.4 max.	4000	_
	1.2	х		180	-2/+0	8.4	+1.5/-0	14.4 max.	2000	_

## 2 Packing codes

The last two digits of the complete ordering code state the packing mode:

Last two digits			
60	SMD	Cardboard tape	180-mm reel packing
62	SMD	Blister tape	180-mm reel packing
70	SMD	Cardboard tape	330-mm reel packing
72	SMD	Blister tape	330-mm reel packing


<sup>3)</sup> Chip thickness depends on the resistance value.

K164

#### 3 Taping of radial leaded NTC thermistors

#### **Dimensions and tolerances**

Lead spacing F = 2.5 mm and 5.0 mm (taping to IEC 60286-2)

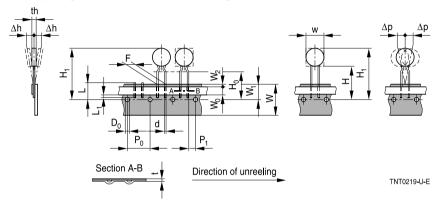

#### Dimensions (mm)


	Lead	Lead	Tolerance of	Remarks
	spacing	spacing	lead spacing	
	2.5 mm	5 mm	2.5/5 mm	
W	11.0	11.5	max.	
th	5.0	6.0	max.	
d	0.5/0.6	0.5/0.6	±0.05	
P <sub>0</sub>	12.7	12.7	±0.3	±1 mm / 20 sprocket holes
P <sub>1</sub>	5.1	3.85	±0.7	
F	2.5	5.0	+0.6/-0.1	
Δh	0	0	±2.0	measured at top of component body
Δρ	0	0	±1.3	
W	18.0	18.0	±0.5	
$\overline{W_0}$	5.5	5.5	min.	peel-off force ≥5 N
$\overline{W_1}$	9.0	9.0	+0.75/-0.5	
$\overline{W_2}$	3.0	3.0	max.	
Н	18.0	18.0	+2.0/-0	
H₀	16.0	16.0	±0.5	
H <sub>1</sub>	32.2	32.2	max.	
$\overline{D_0}$	4.0	4.0	±0.2	
t	0.9	0.9	max.	without wires
L	11.0	11.0	max.	
L <sub>1</sub>	4.0	4.0	max.	



Temperature measurement and compensation	B57164K
Leaded NTC thermistors, lead spacing 5 mm	K164

## Types of packing


## Ammo packing




Ammo type	х	у	z
I	80	240	210

Packing unit: 1000 - 2000 pcs./reel

## Reel packing





Packing unit: 1000 - 2000 pcs./reel


## Reel dimensions (in mm)

Reel type	d	f	n	w
I	360 max.	31 ±1	approx. 45	54 max.
II	500 max.	23 ±1	approx. 59	72 max.



Temperature measurement and compensation	B57164K
Leaded NTC thermistors, lead spacing 5 mm	K164

## Cassette packing

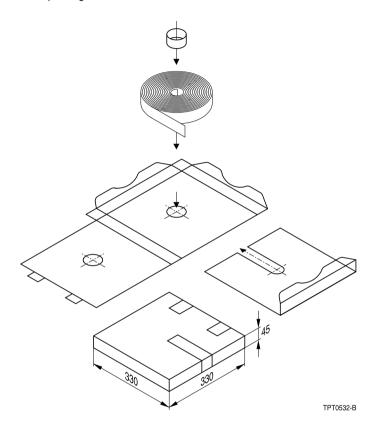

Packing unit: 1000 - 2000 pcs./cassette

## Bulk packing

The components are packed in cardboard boxes, the size of which depends on the order quantity.



Tomposotuse	measurement and	l componention
Telliberature	illeasurement and	a compensation

## Leaded NTC thermistors, lead spacing 5 mm

K164

#### 4 Packing codes

The last two digits of the complete ordering code state the packing mode:

Last two digits			
00, 01, 02, 03,04, 05, 06, 07, 08	_	Bulk	_
40	-	Bulk	_
45	_	Bulk	_
50	Radial leads, kinked	Cardboard tape	Cassette packing
51	Radial leads, kinked	Cardboard tape	360 or 500-mm reel packing
52	Radial leads, straight	Cardboard tape	Cassette packing
53	Radial leads, straight	Cardboard tape	360 or 500-mm reel packing
54	Radial leads, kinked	Cardboard tape	AMMO packing
55	Radial leads, straight	Cardboard tape	AMMO packing

(If no packing code is indicated, this corresponds to 40)

Example 1: B57164K0102J000 Bulk

B57164K0102J052 Cardboard tape, cassette packing

Example 2: B57881S0103F002 Bulk

B57881S0103F251 Cardboard tape, reel packing



K164

### **Mounting instructions**

#### 1 Soldering

#### 1.1 Leaded NTC thermistors

Temperature measurement and compensation

Leaded NTC thermistors, lead spacing 5 mm

Leaded thermistors comply with the solderability requirements specified by CECC.

When soldering, care must be taken that the NTC thermistors are not damaged by excessive heat. The following maximum temperatures, maximum time spans and minimum distances have to be observed:

	Dip soldering	Iron soldering
Bath temperature	max. 260 °C	max. 360 $^{\circ}\text{C}$
Soldering time	max. 4 s	max. 2 s
Distance from thermistor	min. 6 mm	min. 6 mm

Under more severe soldering conditions the resistance may change.

#### 1.2 Leadless NTC thermistors

In case of NTC thermistors without leads, soldering is restricted to devices which are provided with a solderable metallization. The temperature shock caused by the application of hot solder may produce fine cracks in the ceramic, resulting in changes in resistance.

To prevent leaching of the metallization, solder with silver additives or with a low tin content should be used. In addition, soldering methods should be employed which permit short soldering times.

#### 1.3 SMD NTC thermistors

SMD NTC thermistors can be provided with a nickel barrier termination or on special request with silver-palladium termination. The usage of mild, non-activated fluxes for soldering is recommended as well as a proper cleaning of the PCB.

#### Nickel barrier termination

The nickel barrier layer of the silver/nickel/tin termination (see figure 1) prevents leaching of the silver base metalization layer. This allows great flexibility in the selection of soldering parameters.

The tin prevents the nickel layer from oxidizing and thus ensures better wetting by the solder. The nickel barrier termination is suitable for all commonly-used soldering methods.

Note: SMD NTCs with AgPd termination are not approved for lead-free soldering.




Figure 1
SMD NTC thermistors, structure of nickel barrier termination



Temperature measurement and compensation	B57164K
Leaded NTC thermistors, lead spacing 5 mm	K164

## 1.3.1 Solderability (test to IEC 60068-2-58)

Preconditioning: Immersion into flux F-SW 32.

Evaluation criterion: Wetting of soldering areas ≥95%.

Solder	Bath temperature (°C)	Dwell time (s)
SnPb 60/40	215 ±3	3 ±0.3
SnAg (3.0 4.0), Cu (0.5 0.9)	245 ±3	3 ±0.3

#### 1.3.2 Resistance to soldering heat (test to IEC 60068-2-58)

Preconditioning: Immersion into flux F-SW 32. Evaluation criterion: Leaching of side edges  $\leq 1/3$ .

Solder	Bath temperature (°C)	Dwell time (s)
SnPb 60/40	260 ±5	10 ±1
SnAg (3.0 4.0), Cu (0.5 0.9)	260 ±5	10 ±1




## Leaded NTC thermistors, lead spacing 5 mm


K164


#### Wave soldering

Temperature characteristic at component terminal with dual wave soldering

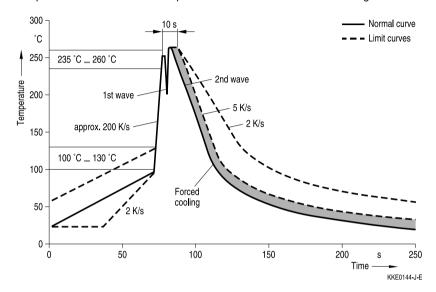

## Solder joint profiles for silver/nickel/tin terminations





KKE0288-H-E

not soldered in preferred direction


Page 20 of 30



K164

#### Reflow soldering

Recommended temperature characteristic for reflow soldering following JEDEC J-STD-020D



		T	T
Profile feature		Sn-Pb eutectic assembly	Pb-free assembly
Preheat and soak			
- Temperature min	$T_{smin}$	100 °C	150 °C
- Temperature max	$T_{smax}$	150 °C	200 °C
- Time	$t_{\text{smin}}$ to $t_{\text{smax}}$	60 120 s	60 180 s
Average ramp-up rate	$T_{smax}$ to $T_p$	3 °C/ s max.	3 °C/ s max.
Liquidous temperature	T <sub>L</sub>	183 °C	217 °C
Time at liquidous	$t_{L}$	60 150 s	60 150 s
Peak package body temperature	T <sub>p</sub> <sup>1)</sup>	220 °C 235 °C <sup>2)</sup>	245 °C 260 °C <sup>2)</sup>
Time (t <sub>P</sub> ) <sup>3)</sup> within 5 °C of specified		20 s <sup>3)</sup>	30 s <sup>3)</sup>
classification temperature (T <sub>c</sub> )		20 5%	30 8%
Average ramp-down rate	T <sub>p</sub> to T <sub>smax</sub>	6 °C/ s max.	6 °C/ s max.
Time 25 °C to peak temperature		maximum 6 min	maximum 8 min

<sup>1)</sup> Tolerance for peak profile temperature (T<sub>P</sub>) is defined as a supplier minimum and a user maximum.

**Note:** All temperatures refer to topside of the package, measured on the package body surface. Number of reflow cycles: 3


<sup>2)</sup> Depending on package thickness. For details please refer to JEDEC J-STD-020D.

<sup>3)</sup> Tolerance for time at peak profile temperature (t<sub>P</sub>) is defined as a supplier minimum and a user maximum.




Temperature measurement and compensation	B57164K
Leaded NTC thermistors, lead spacing 5 mm	K164

#### Solder joint profiles for silver/nickel/tin terminations

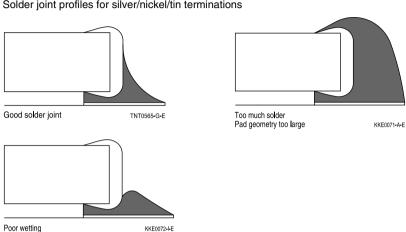

#### Recommended geometry of solder pads 1.3.3



#### Recommended maximum dimensions (mm)

Case size inch/mm	Α	В	С
0402/1005	0.6	0.6	1.7
0603/1608	1.0	1.0	3.0
0805/2012	1.3	1.2	3.4
1206/3216	1.8	1.2	4.5

#### 1.3.4 **Notes**

Iron soldering should be avoided, hot air methods are recommended for repair purposes.



Tomposotuse	measurement an	d commonation
Telliberature	: measurement an	u compensation

#### Leaded NTC thermistors, lead spacing 5 mm

K164

#### 2 Conductive adhesion

An alternative to soldering is the gluing of thermistors with conductive adhesives. The benefit of this method is that it involves no thermal stress. The adhesives used must be chemically inert.

#### 3 Clamp contacting

Pressure contacting by means of clamps is particularly suitable for applications involving frequent switching and high turn-on powers.

#### 4 Robustness of terminations (leaded types)

The leads meet the requirements of IEC 60068-2-21. They may not be bent closer than 4 mm from the solder joint on the thermistor body or from the point at which they leave the feed-throughs. During bending, any mechanical stress at the outlet of the leads must be removed. The bending radius should be at least 0.75 mm.

Tensile strength: Test Ua1:

Leads  $\varnothing \le 0.25 \text{ mm} = 1.0 \text{ N}$ 

 $0.25 < \emptyset \le 0.35 \text{ mm} = 2.5 \text{ N}$  $0.35 < \emptyset \le 0.50 \text{ mm} = 5.0 \text{ N}$ 

 $0.50 < \emptyset \le 0.80 \text{ mm} = 10.0 \text{ N}$  $0.80 < \emptyset \le 1.25 \text{ mm} = 20.0 \text{ N}$ 

Bending strength: Test Ub:

Two 90°-bends in opposite directions at a weight of 0.25 kg.

Torsional strength: Test Uc: severity 2

The lead is bent by 90° at a distance of 6 to 6.5 mm from the thermistor body.

The bending radius of the leads should be approx. 0.75 mm. Two torsions of

180° each (severity 2).

When subjecting leads to mechanical stress, the following should be observed:

Tensile stress on leads

During mounting and operation tensile forces on the leads are to be avoided.

Bending of leads

Bending of the leads directly on the thermistor body is not permissible.

A lead may be bent at a minimum distance of twice the wire's diameter +2 mm from the solder joint on the thermistor body. During bending the wire must be mechanically relieved at its outlet. The bending radius should be at least 0.75 mm.

Twisting of leads

The twisting (torsion) by  $180^{\circ}$  of a lead bent by  $90^{\circ}$  is permissible at 6 mm from the bottom of the thermistor body.



-						
	embera	ture n	neasuren	nent and	compensatio	n

#### Leaded NTC thermistors, lead spacing 5 mm

K164

#### 5 Sealing and potting

When thermistors are sealed, potted or overmolded, there must be no mechanical stress caused by thermal expansion during the production process (curing / overmolding process) and during later operation. The upper category temperature of the thermistor must not be exceeded. Ensure that the materials used (sealing / potting compound and plastic material) are chemically neutral.

#### 6 Cleaning

Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.

#### 7 Storage

In order to maintain their solderability, thermistors must be stored in a non-corrosive atmosphere. Humidity, temperature and container materials are critical factors.

Do not store SMDs where they are exposed to heat or direct sunlight. Otherwise, the packing material may be deformed or SMDs may stick together, causing problems during mounting. After opening the factory seals, such as polyvinyl-sealed packages, use the SMDs as soon as possible.

The components should be left in the original packing. Touching the metallization of unsoldered thermistors may change their soldering properties.

Storage temperature: -25 °C up to 45 °C

Relative humidity (without condensation): ≤75% annual mean

<95%, maximum 30 days per annum


Solder the thermistors listed in this data book after shipment from EPCOS within the time specified:

SMDs with nickel barrier termination: 12 months
SMDs with AgPd termination: 6 months
Leaded components: 24 months


K164

#### 8 Placement and orientation of SMD NTC thermistors on PCB


#### a) Component placement



It is recommended that the PC board should be held by means of some adequate supporting pins such as shown left to prevent the SMDs from being damaged or cracked.




#### b) Cracks



When placing a component near an area which is apt to bend or a grid groove on the PC board, it is advisable to have both electrodes subjected to uniform stress, or to position the component's electrodes at right angles to the grid groove or bending line (see c) Component orientation).

## c) Component orientation



Choose a mounting position that minimizes the stress imposed on the chip during flexing or bending of the board.



Temperatu	ıre measur	ement and	compe	ensation

#### Leaded NTC thermistors, lead spacing 5 mm

K164

#### Cautions and warnings

See "Important notes".

#### Storage

- Store thermistors only in original packaging. Do not open the package prior to storage.
- Storage conditions in original packaging: storage temperature −25 °C ... +45 °C, relative humidity ≤75% annual mean, <95% maximum 30 days per annum, dew precipitation is inadmissible.</p>
- Do not store thermistors where they are exposed to heat or direct sunlight. Otherwise, the packing material may be deformed or components may stick together, causing problems during mounting.
- Avoid contamination of thermistor surface during storage, handling and processing.
- Avoid storage of thermistors in harmful environments like corrosive gases (SO<sub>x</sub>, Cl etc).
- Use the components as soon as possible after opening the factory seals, i.e. the polyvinyl-sealed packages.
- Solder thermistors within the time specified after shipment from EPCOS.
  For leaded components this is 24 months, for SMD components with nickel barrier termination 12 months, for SMD components with AgPd termination 6 months.

#### Handling

- NTC thermistors must not be dropped. Chip-offs or any other damage must not be caused during handling of NTCs.
- Do not touch components with bare hands. Gloves are recommended.
- Avoid contamination of thermistor surface during handling.
- Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.

#### Bending / twisting leads

- A lead (wire) may be bent at a minimum distance of twice the wire's diameter plus 4 mm from the component head or housing. When bending ensure the wire is mechanically relieved at the component head or housing. The bending radius should be at least 0.75 mm.
- Twisting (torsion) by 180° of a lead bent by 90° is permissible at 6 mm from the bottom of the thermistor body.

#### Soldering

- Use resin-type flux or non-activated flux.
- Insufficient preheating may cause ceramic cracks.
- Rapid cooling by dipping in solvent is not recommended.
- Complete removal of flux is recommended.



Temperature measurement and compensation

B57164K

#### Leaded NTC thermistors, lead spacing 5 mm

K164

#### Mounting

- Ensure that no thermo-mechanical stress occurs due to production processes (curing or overmolding processes) when thermistors are sealed, potted or overmolded or during their subsequent operation. The maximum temperature of the thermistor must not be exceeded. Ensure that the materials used (sealing/potting compound and plastic material) are chemically neutral.
- Electrodes/contacts must not be scratched or damaged before/during/after the mounting process.
- Contacts and housing used for assembly with the thermistor must be clean before mounting.
- Ensure that adjacent materials are designed for operation at temperatures comparable to the surface temperature of the thermistor. Be sure that surrounding parts and materials can withstand the temperature.
- Avoid contamination of the thermistor surface during processing.
- The connections of sensors (e.g. cable end, wire end, plug terminal) may only be exposed to an environment with normal atmospheric conditions.
- Tensile forces on cables or leads must be avoided during mounting and operation.
- Bending or twisting of cables or leads directly on the thermistor body is not permissible.
- Avoid using chemical substances as mounting aids. It must be ensured that no water or other liquids enter the NTC thermistors (e.g. through plug terminals). In particular, water based substances (e.g. soap suds) must not be used as mounting aids for sensors.

#### Operation

- Use thermistors only within the specified operating temperature range.
- Use thermistors only within the specified power range.
- Environmental conditions must not harm the thermistors. Only use the thermistors under normal atmospheric conditions or within the specified conditions.
- Contact of NTC thermistors with any liquids and solvents shall be prevented. It must be ensured that no water enters the NTC thermistors (e.g. through plug terminals). For measurement purposes (checking the specified resistance vs. temperature), the component must not be immersed in water but in suitable liquids (e.g. Galden).
- Avoid dewing and condensation unless thermistor is specified for these conditions.
- Bending or twisting of cables and/or wires is not permissible during operation of the sensor in the application.
- Be sure to provide an appropriate fail-safe function to prevent secondary product damage caused by malfunction.

This listing does not claim to be complete, but merely reflects the experience of EPCOS AG.



Temperature measurement and compensation	B57164K
Leaded NTC thermistors, lead spacing 5 mm	K164

## Symbols and terms

Symbol	English	German
A AWG	Area American Wire Gauge	Fläche Amerikanische Norm für Drahtquerschnitte
B B <sub>25/100</sub>	B value B value determined by resistance measurement at 25 °C and 100 °C	B-Wert B-Wert, ermittelt durch Widerstands- messungen bei 25 °C und 100 °C
$C_{th}$	Heat capacitance	Wärmekapazität
1	Current	Strom
N	Number (integer)	Anzahl (ganzzahliger Wert)
$egin{aligned} & P_{25} \ & P_{diss} \ & P_{el} \ & P_{max} \end{aligned}$	Maximum power at 25 °C Power dissipation Electrical power Maximum power within stated temperature range	Maximale Leistung bei 25 °C Verlustleistung Elektrische Leistung Maximale Leistung im angegebenenTemperaturbereich
$\begin{array}{l} \Delta R_{\text{B}}/R_{\text{B}} \\ \\ R_{\text{ins}} \\ R_{\text{P}} \\ \\ R_{\text{R}} \\ \Delta R_{\text{B}}/R_{\text{R}} \\ \\ R_{\text{S}} \\ \\ R_{\text{T}} \end{array}$	Resistance tolerance caused by spread of B value Insulation resistance Parallel resistance Rated resistance Resistance tolerance Series resistance Resistance at temperature T (e.g. R <sub>25</sub> = resistance at 25 °C)	Widerstandstoleranz, die durch die Streuung des B-Wertes verursacht wird Isolationswiderstand Parallelwiderstand Nennwiderstand Widerstandstoleranz Serienwiderstand Widerstand bei Temperatur T (z.B. R <sub>25</sub> = Widerstand bei 25 °C)
$\begin{array}{c} T \\ \Delta T \\ t \\ T_A \\ T_{max} \end{array}$	Temperature Temperature tolerance Time Ambient temperature Upper category temperature Lower category temperature	Temperatur Temperaturtoleranz Zeit Umgebungstemperatur Obere Grenztemperatur (Kategorietemperatur) Untere Grenztemperatur (Kategorietemperatur)
$T_{op}$ $T_{R}$ $T_{surf}$	Operating temperature Rated temperature Surface temperature	Betriebstemperatur Nenntemperatur Oberflächentemperatur
$egin{array}{c} V \ V_{ins} \ V_{op} \ V_{test} \end{array}$	Voltage Insulation test voltage Operating voltage Test voltage	Spannung Isolationsprüfspannung Betriebsspannung Prüfspannung



Temperature measurement and compensation	B57164K
Leaded NTC thermistors, lead spacing 5 mm	K164

English	German
Temperature coefficient	Temperaturkoeffizient
Tolerance, change	Toleranz, Änderung
Dissipation factor	Wärmeleitwert
Thermal cooling time constant	Thermische Abkühlzeitkonstante Thermische Zeitkonstante
	Temperature coefficient Tolerance, change Dissipation factor

## Abbreviations / Notes

Symbol	English	German
SMD	Surface-mounted devices	Oberflächenmontierbares Bauelement
*	To be replaced by a number in ordering codes, type designations etc.	Platzhalter für Zahl im Bestellnummern- code oder für die Typenbezeichnung.
+	To be replaced by a letter.	Platzhalter für einen Buchstaben.
	All dimensions are given in mm.	Alle Maße sind in mm angegeben.
	The commas used in numerical values denote decimal points.	Verwendete Kommas in Zahlenwerten bezeichnen Dezimalpunkte.



#### Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- 7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## **EPCOS**:

```
B57164K101J B57164K103J B57164K104J B57164K150K B57164K151J B57164K151K B57164K152J B57164K152K B57164K153J B57164K153K B57164K154J B57164K154K B57164K220J B57164K220K B57164K221J B57164K221K B57164K222J B57164K222K B57164K223J B57164K223K B57164K224J B57164K233U B57164K330J B57164K330K B57164K331J B57164K331K B57164K332J B57164K332K B57164K333J B57164K333K B57164K334J B57164K334K B57164K470J B57164K470K B57164K471J B57164K471K B57164K472J B57164K472K B57164K473J B57164K473K B57164K474J B57164K474K B57164K680J B57164K680K B57164K682J B57164K682K B57164K683J B57164K683K B57164K101K B57164K102K B57164K102K B57164K103K B57164K104K
```