

承認書

SPECIFICATION FOR APPROVAL

CUSTOMER : RCS
MODEL NAME : TRANSFORMER EFD15
CUSTOMER P/N : LTE-EFD-15-6.5uH-V2
L.T.E. PART NO. : _____
DATE : 2007.04.27

核准 APPROVED	校對 CHECKED	承辦 ISSUED
張知本	黃華	黃婷


客戶承認 FOR CUSTOMER APPROVAL	
簽名 SIGNATURE	日期 DATE




力英電子股份有限公司
Li Tone Electronics (L.T.E.) Co., Ltd
臺北縣三峽鎮介壽路1段311巷29號
No.29, Lane 311, Sec 1, JieSou Rd.
Sanhsia, Taipei, Taiwan 237
<http://www.LTE.com.tw>

TEL:+886-2-2673-2512
FAX:+886-2-2671-0294
+886-2-2671-9331
+886-2-8671-3701

1. SCHEMATICS.

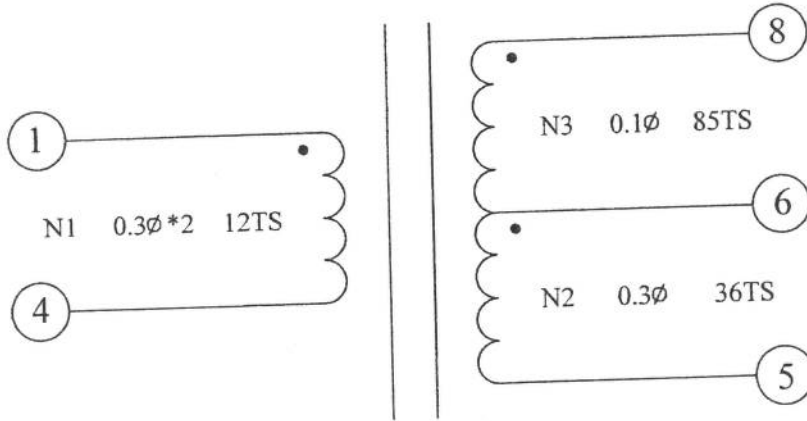

2. WINDING SEQUENCE.

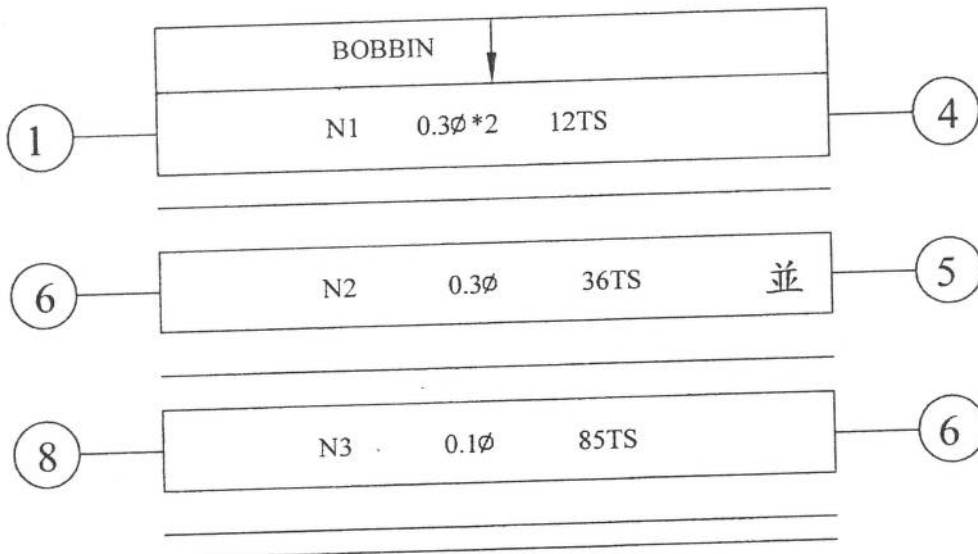

CUSTOMER: R.C.S (烏克蘭)		APPROVED BY:
PART NO. LTE-EFD-15-6.5uH-V2 E04-03156R52-00	ISSUE: A	CHECKED BY:
DATE: 2007-04-27		DRAWN BY: 黃婷
	力英電子股份有限公司 LI TONE ELECTRONICS CO., LTD. 台北縣三峽鎮介壽路1段311巷29號 NO. 29, LANE 311, JIE SOU RU., SEC 1. SANHSIA TOWAN TAIPEI HSIEN, TAIWAN R. O. C.	TEL: (02) 2673 - 2512 - 6 FAX: 886 - 2 - 26710294 886 - 2 - 26736329

小哲

3.MATERIAL LIST.


NO/ITEM	MATERIAL	SUPPLIER
1.CORE	EFD15 FERRITE CORE 3F3. (GAP=0.35mm)	FERROXCUBE.
2.BOBBIN	EFD15 H. TYPE W/8PINS. LCP-E4008. SMD-EFD-15-007.	CHANG CHUN PLASTICS CO.,LTD. UL NO.E59481(S). TAIWAN SHU LIN ENTERPRISE CO.,LTD.
3.WIRE	2UEW/130°C	PACIFIC ELECTRIC WIRE & CABLE CO.LTD. UL NO.E84081.
4.TAPE	POLYESTER TAPE. #1350F-1.	MINNESOTA MINING & MFG CO.,LTD.(3M). UL NO.E17385.
5.EPOXY	3300A/B	DONG GUAN CITY HUMEN EATTO INSULATION MATERIAL FACTORY. UL NO. E218090.
6.CLIP	EFD15 HIGH CARBON STEEL.	SHEN SHEN INDUSTRIAL CO., LTD.
7.SOLDER	PURE TIN 2HAO,2LF30	WELLEY SOLDER CO., LTD.

* ROHS COMPLIANT(無鉛製程)


4.ELECTRICAL SPECIFICATIONS .

4-1.INDUCTANCE. P(1-4) 6.5uH±10%. @ 1 KHz 0.25V HP-4282A.


4-2.D.C. RESISTANCE. P(1-4) 0.25 Ω MAX. BY GOM-801G.

CUSTOMER: R.C.S (烏克蘭)		APPROVED BY: 
PART NO. LTE-EFD-15-6.5uH-V2 E04-03156R52-00	ISSUE: A	CHECKED BY: 
DATE: 2007-04-27		DRAWN BY: 黃婷
		TEL: (02) 2673 - 2512 - 6 FAX: 886 - 2 - 26710294 886 - 2 - 26736329
力英電子股份有限公司 LI TONE ELECTRONICS CO., LTD. 台北縣三峽鎮介壽路1段311巷29號 NO. 29, LANE 311, JIE SOU RU., SEC 1. SANHSIA TOWAN TAIPEI HSIEN, TAIWAN R. O. C.		


5.CONFIGURATION & DIMENSION.(UNIT:mm)

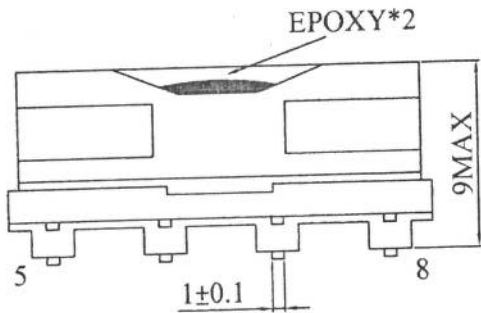

(FRONT VIEW)

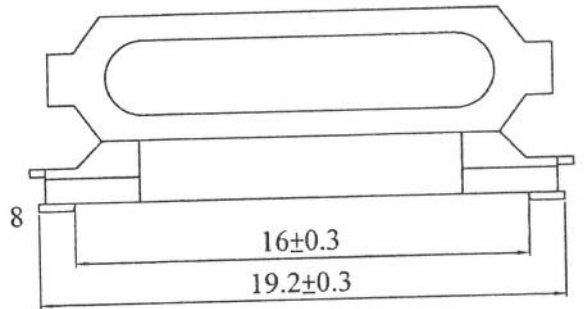

(SIDE VIEW)

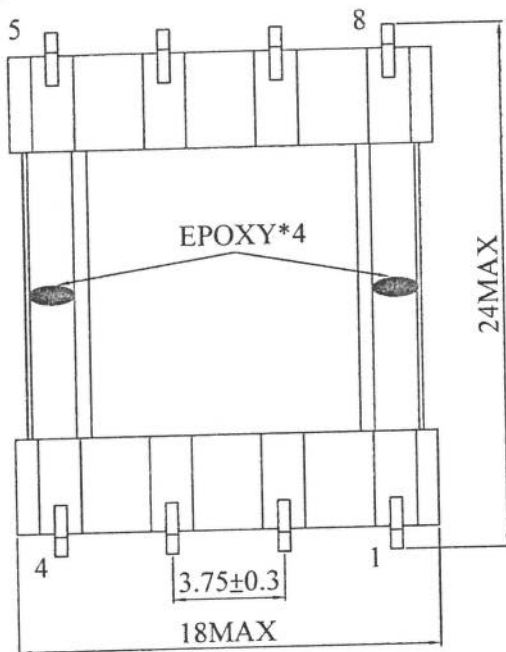

(BOTTOM VIEW)

*不用含浸 WITHOUT VARNISH

* PIN1打白點 MARKING WHITE DOT AT PIN1

*CORE與CORE的接縫處需點膠固定
(共四點) GLUE 4 DOTS OF 3300A/B EPOXY
BETWEEN CORE AND CORE

CUSTOMER:

R.C.S (烏克蘭)

APPROVED BY:



PART NO.

LTE-EFD-15-6.5uH-V2
E04-03156R52-00

ISSUE: A

CHECKED BY:

黃婷

DATE: 2007-04-27

DRAWN BY:

黃婷



力英電子股份有限公司
LI TONE ELECTRONICS CO., LTD.
台北縣三峽鎮介壽路1段311巷29號
NO.29, LANE 311, JIE SOU RU., SEC 1. SANHSIA
TOWAN TAIPEI HSIEN, TAIWAN R. O. C.

TEL:
(02) 2673 - 2512 - 6

FAX:
886 - 2 - 26710294
886 - 2 - 26736329